


Agilent Technologies




EPM Series Power Meters

E-Series and 8480 Series Power Sensors

Technical Specifications

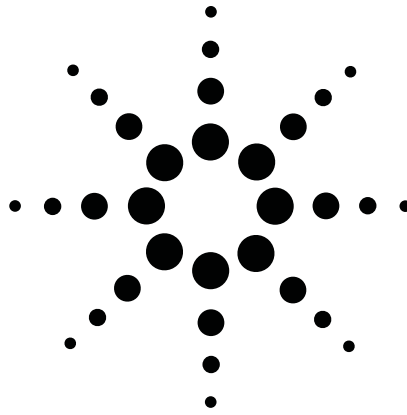

Product Specifications
and Characteristics

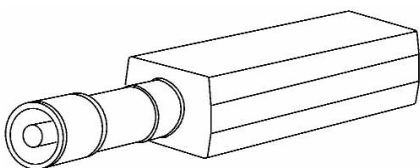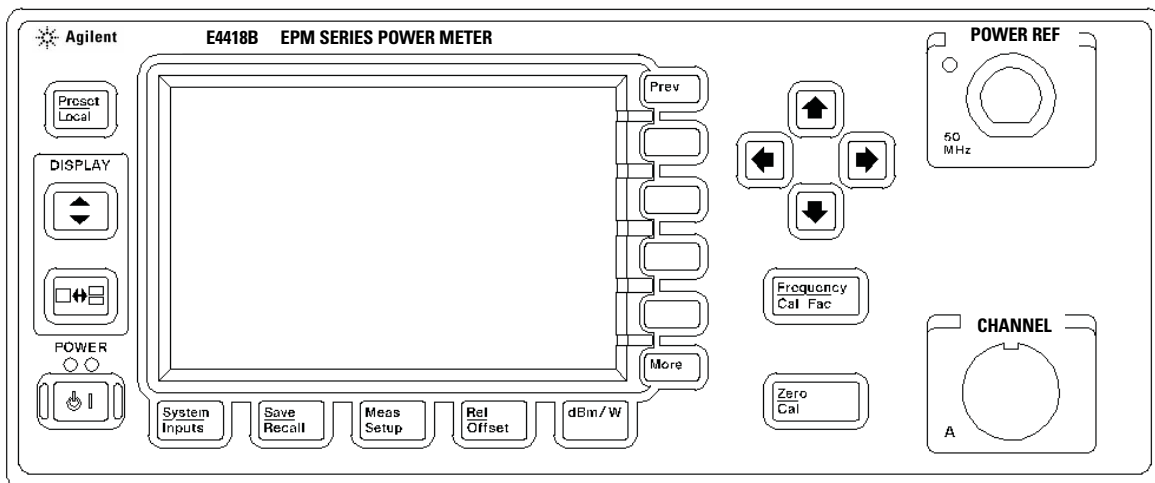

Agilent Technologies
Innovating the HP Way

EPM Series E4418B and E4419B Power Meters

Specifications describe the instrument's warranted performance and apply after a 30 minute warm-up. These specifications are valid over its operating/environmental range unless otherwise stated and after performing a zero and calibration procedure.

Supplemental characteristics (shown in *italics*) are intended to provide additional information, useful in applying the instrument by giving typical (expected), but not warranted performance parameters. These characteristics are shown in *italics* or labeled as "typical", "nominal" or "approximate".

For information on measurement uncertainty calculations, refer to Application Note 64-1B, "Fundamentals of RF and Microwave Power Measurements", literature number 5965-6380E.

Frequency Range: 9 kHz to 110 GHz, sensor dependent.

Power Range: -70 dBm to +44 dBm (100 pW to 25 W), sensor dependent.

Power Sensors: Compatible with all 8480 series and E-series sensors.

Single Sensor Dynamic Range:
90 dB maximum (E-series sensors),
50 dB maximum (8480 series sensors).

Display Units:
Absolute: Watts or dBm.
Relative: Percent or dB.

Display Resolution: Selectable resolution of 1.0, 0.1, 0.01, and 0.001 dB in Log mode, or 1 to 4 digits in Linear mode.

Default Resolution: 0.01 dB in Log mode, 3 digits in Linear mode.

Accuracy

Instrumentation

Absolute: ± 0.02 dB (Log) or $\pm 0.5\%$ (linear). Please add the corresponding power sensor linearity percentage from Tables 7 and 10 (for the E-series sensors) and Table 15 (for the 8480 series sensors).

Relative: ± 0.04 dB (Log) or $\pm 1.0\%$ (linear). Please add the corresponding power sensor linearity percentage from Table 16 (for the 8480 series sensors).

Zero Set (digital settability of zero): sensor dependent (refer to Table 1). For E-series sensors, this specification applies to a ZERO performed when the sensor input is not connected to the POWER REF.

Power Reference

Power Output: 1.00 mW (0.0 dBm). Factory set to $\pm 0.7\%$ traceable to the U.S. National Institute of Standards and Technology.

Accuracy: $\pm 1.2\%$ worst case ($\pm 0.9\%$ rss) for one year.

Table 1

| Model | ZERO SET |
|--|------------------|
| 8481A, 8482A, 8483A, 8485A, 8487A, R8486A, Q8486A, | ± 50 nW |
| 8481B, 8482B | ± 50 μ W |
| 8481D, 8485D, 8487D | ± 20 pW |
| 8481H, 8482H | ± 5 μ W |
| R8486D, Q8486D | ± 30 pW |
| V8486A, W8486A | ± 200 nW |
| E4412A, E4413A | ± 50 pW |
| E9300A, E9301A, E9304A ¹ | ± 500 pW |
| E9300B, E9301B ¹ | ± 500 nW |
| E9300H, E9301H ¹ | ± 5 nW |

1. Specification applies to the Low Power Path 15% to 75% relative humidity.

Supplemental Characteristics

Power Reference

Frequency: 50 MHz nominal.

SWR: 1.05 maximum.

Connector: Type N (f), 50 ohms.

Measurement Speed

Three measurement speed modes, over the GPIB, are available as shown, along with the typical maximum measurement speed for each mode.

With the E4418B power meter:

Normal: 20 readings/second

x2: 40 readings/second

Fast: 200 readings/second

With the E4419B, the measurement speed is reduced, for example, with both channels in FAST mode, the typical maximum measurement speed is 100 readings/second.

Fast mode is for E-series sensors only.

Maximum measurement speed is obtained using binary output and in Free Run trigger mode.

Zero Drift of Sensors: Sensor dependent, refer to Table 2. For E9300 sensors, refer to Table 12 for complete data.

Measurement Noise: Sensor dependent, refer to Table 2 and Table 3. For E9300 sensors, refer to Table 12.

Effects of Averaging on Noise: Averaging over 1 to 1024 readings is available for reducing noise. Table 2 provides the Measurement Noise for a particular sensor with the number of averages set at 16 (for Normal mode) and 32 (for x2 mode). Use the Noise Multiplier, for the appropriate mode (Normal or x2) and number of averages, to determine the total Measurement Noise value.

Example:

8481D Power Sensor, Normal mode, Number of Averages = 4.

Measurement Noise calculation:

$(<45 \text{ pW} \times 2.75) = <121 \text{ pW}$.

Table 2

| Model | Zero Drift ⁽¹⁾ | Measurement Noise ⁽²⁾ |
|---|---------------------------|----------------------------------|
| 8481A, 8482A, 8483A, 8485A, 8487A, R8486A, Q8486A, | <±10 nW | <110 nW |
| 8481B, 8482B | <±10 μW | <110 μW |
| 8481D, 8485D, 8487D | <±4 pW | <45 pW |
| 8481H, 8482H | <±1 μW | <10 μW |
| R8486D, Q8486D | <±6 pW | <65 pW |
| V8486A, W8486A | <±40 nW | <450 nW |
| E4412A, E4413A | <±15 pW | <70 pW |
| E9300A, E9301A, E9304A ³ | <±150 pW | <700 pW |
| E9300B, E9301B ³ | <±150 nW | <700 nW |
| E9300H, E9301H ³ | <±1.5 nW | <7 nW |

1. Within 1 hour after zero set, at a constant temperature, after a 24-hour warm-up of the power meter.
2. The number of averages at 16 for **Normal** mode and 32 for **x2** mode, at a constant temperature, measured over a one minute interval and two standard deviations. For E-series sensors, the measurement noise is measured within the low range. Refer to the relevant sensor manual for further information.
3. Specification applies to the Low Power Path, 15% to 75% relative humidity.

Table 3

| Number of Averages | 1 | 2 | 4 | 8 | 16 | 32 | 64 | 128 | 256 | 512 | 1024 |
|-----------------------------------|-----|------|------|------|------|------|------|------|------|------|------|
| Noise Multiplier (Normal mode) | 5.5 | 3.89 | 2.75 | 1.94 | 1 | 0.85 | 0.61 | 0.49 | 0.34 | 0.24 | 0.17 |
| Noise Multiplier (x2 mode) | 6.5 | 4.6 | 3.25 | 2.3 | 1.63 | 1 | 0.72 | 0.57 | 0.41 | 0.29 | 0.2 |

EPM Series E4418B and E4419B Power Meters

Settling Time ¹


For 8480 Series Sensors:

Manual filter, 10 dB decreasing power step.

Table 4

| Number of Averages | 1 | 2 | 4 | 8 | 16 | 32 | 64 | 128 | 256 | 512 | 1024 |
|--------------------------------|------|------|------|------|------|-----|-----|-----|-----|------|------|
| Settling Time(s) (Normal Mode) | 0.15 | 0.2 | 0.3 | 0.5 | 1.1 | 1.9 | 3.4 | 6.6 | 13 | 27 | 57 |
| Settling Time(s) (x2 Mode) | 0.15 | 0.18 | 0.22 | 0.35 | 0.55 | 1.1 | 1.9 | 3.5 | 6.9 | 14.5 | 33 |

Auto filter, default resolution, 10 dB decreasing power step (Normal and x2 modes):

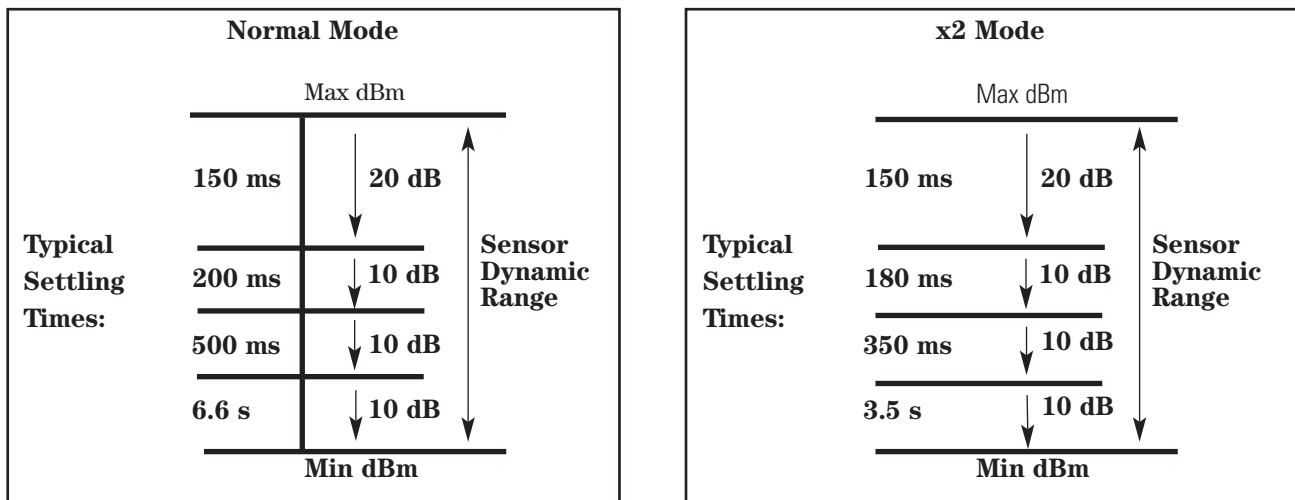

For E-Series Sensors:

In **FAST** mode (using Free Run trigger), within the range -50 dBm to +17 dBm, for a 10 dB decreasing power step, the settling time is:

E4418B: 10 ms ²

E4419B: 20 ms ²

Manual filter, 10 dB decreasing power step (not across the range switch point):


Table 5

| Number of Averages | 1 | 2 | 4 | 8 | 16 | 32 | 64 | 128 | 256 | 512 | 1024 |
|--------------------------------|------|------|------|------|-----|-----|-----|-----|-----|------|------|
| Settling Time(s) (Normal Mode) | 0.07 | 0.12 | 0.21 | 0.4 | 1 | 1.8 | 3.3 | 6.5 | 13 | 27 | 57 |
| Settling Time(s) (x2 Mode) | 0.04 | 0.07 | 0.12 | 0.21 | 0.4 | 1 | 1.8 | 3.4 | 6.8 | 14.2 | 32 |


1. Settling Time: 0 to 99% settled readings over the GPIB

2. When a power step crosses through the sensor's auto-range switch point, add 25 mS. Refer to the relevant sensor manual for switch point information.


For E4412A and E4413A Sensors
**Auto filter, default resolution,
 10 dB decreasing power step
 (not across the range switch point):**

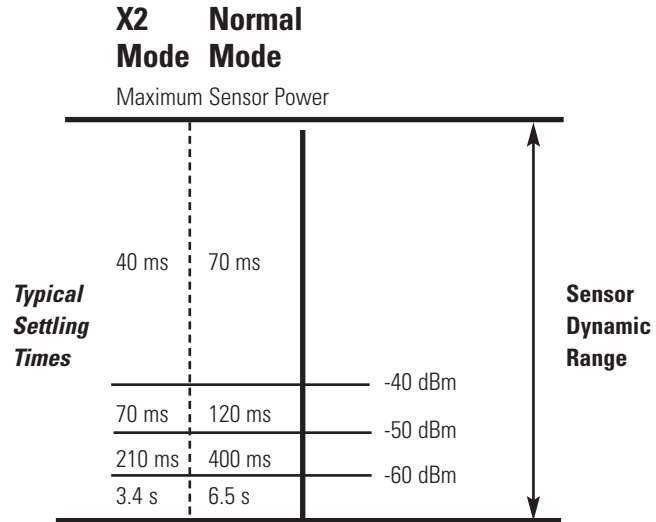

For E-series E9300A Sensors

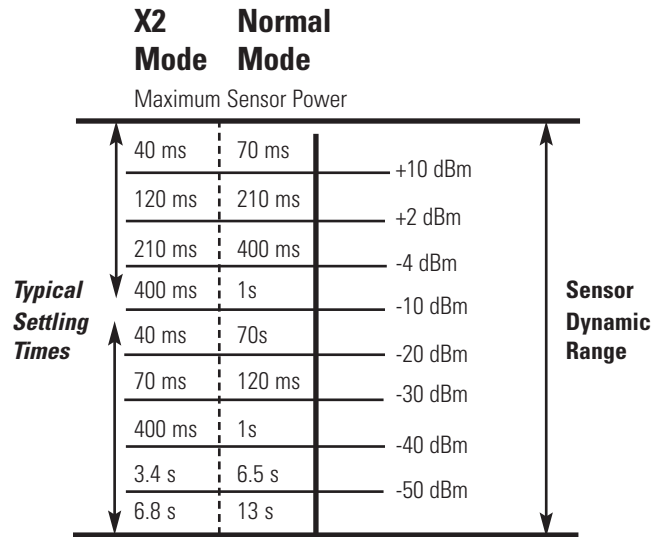

For E-series E9300B and H Sensors

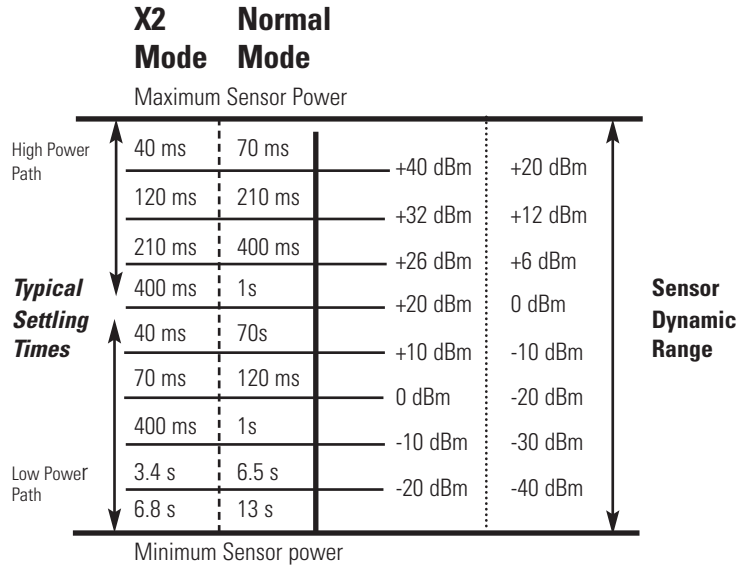

Power Meter Functions

Accessed by key entry: either hardkeys, or softkey menu, and programmable.

Zero: Zeros the meter. (Power reference calibrator is switched off during zeroing.)

Cal: Calibrates the meter using internal (power reference calibrator) or external source. Reference Cal Factor settable from 1% to 150%, in 0.1% increments.

Frequency: Entered frequency range is used to interpolate the calibration factors table.

Range: 1 kHz to 999.9 GHz, settable in 1 kHz steps.

Cal Factor: Sets the Calibration Factor for the meter. Range: 1% to 150%, in 0.1% increments.

Relative: Displays all successive measurements relative to the last displayed value.

Offset: Allows power measurements to be offset by -100 dB to +100 dB, settable in 0.001dB increments, to compensate for external loss or gain.

Save/Recall: Store up to 10 instrument states via the Save/Recall menu.

dBm/W: Selectable units of either Watts or dBm in absolute power; or percent or dB for relative measurements.

Filter (averaging): Selectable from 1 to 1024. Auto-averaging provides automatic noise compensation.

Duty Cycle: Duty cycle values between 0.001% to 99.999%, in 0.001% increments, can be entered to display a peak power representation of measured power. The following equation is used to calculate the displayed peak power value: Peak Power = Measured Power/DutyCycle.

Sensor Cal Tables: Selects cal factor versus frequency tables corresponding to specified sensors (8480 series only).

Limits: High and low limits can be set in the range -150.000 dBm to +230.000 dBm, in 0.001 dBm increments.

Preset Default Values: dBm mode, Rel Off, Power Reference Off, Duty Cycle Off, Offset Off, Frequency 50 MHz, AUTO Average, Free Run, AUTO range (for E-series sensors).

Display: Selectable single and split screen formats are available. A quasi-analog display is available for peaking measurements. The dual channel power meter can simultaneously display any two configurations of A, B, A/B, B/A, A-B, B-A and Relative.

General Characteristics

Rear Panel Connectors

Recorder Outputs: Analog 0 to 1 Volt, 1 kohm output impedance, BNC connector. E4419B recorder outputs are dedicated to Channel A and Channel B.

Remote Input/Output: A TTL logic level is output when the measurement exceeds a predetermined limit. TTL inputs are provided to initiate zero and calibration cycles. RJ-45 series shielded modular jack assembly connector. TTL Output: high =4.8V max; low = 0.2V max TTL

Input: high = 3.5V min, 5V max; low = 1V max, -0.3V min.

GPIB: Allows communication with an external controller.

RS-232/442: Allows communication with an external RS-232 or RS-422 controller. Male/Plug 9 position D-subminiature connector

Ground: Binding post, accepts 4 mm plug or bare-wire connection.

Line Power

Input Voltage Range: 85 to 264 VAC, automatic selection.

Input Frequency Range: 50 to 440 Hz.

Power Requirement: approximately 50 VA (14 Watts) for E4418B and E4419B.

Battery Option 001 Operational Characteristics¹

The following information describes characteristic performance based at a temperature of 25 °C unless otherwise noted.

Typical operating time: up to 3.5 hours with LED backlight on; up to 5.5 hours with LED backlight off (E4418B power meter).

Charge time: 2 hours to charge fully from an empty state; 50 minutes charging enables 1 hour of operation with LED backlight on; 35 minutes charging enables 1hr operation with LED backlight off. Power meter is operational whilst charging.

Service life: (to 70% of initial capacity at 25 °C): 450 charge/discharge cycles

Chemistry: Nickel Metal Hydride

Weight: 1kg

Environmental Characteristics

General Conditions: Complies with the requirements of the EMC Directive 89/336/EEC. This includes Generic Immunity Standard EN 50082-1: 1992 and Radiated Interference Standard EN 55011: 1991/CISPR11:1990, Group 1 - Class A.

Operating Environment

Temperature: 0 °C to 55 °C.

Maximum Humidity: 95% at 40 °C (non-condensing).

Minimum Humidity: 15% at 40 °C (non-condensing).

Maximum Altitude: 3000 meters (9840 feet).

Storage Conditions

Storage Temperature: -20 °C to +70 °C.

Non-operating Maximum Humidity: 90% at 65 °C (non-condensing).

Non-operating Maximum Altitude: 15240 meters (50000 feet).

General

Dimensions: The following dimensions exclude front and rear protrusions.

212.6 mm W x 88.5 mm H x 348.3 mm D
(8.5 in x 3.5 in x 13.7 in)

Weight

Net: E4418B: 4.0 kg (8.8 lb).
E4419B: 4.1 kg (9.0 lb).

Shipping:

E4418B: 7.9 kg (17.4 lb).
E4419B: 8.0 kg (17.6 lb).

Remote Programming

Interface: GBIB interface operates to IEEE 488.2. RS-232 and RS-422 serial interface supplied as standard.

Command Language: SCPI standard interface commands. 436A and 437B code compatible (E4418B only); 438A code compatible (E4419B only).

GPIB Compatibility: SH1, AH1, T6, TE0, L4, LE0, SR1, RLI, PP1, DC1, DT1, C0.

Non-volatile Memory

Battery: Lithium Polycarbon Monofluoride, approximate lifetime 5 years at 25 °C.

Safety

Conforms to the following Product Specifications:

EN61010-1: 1993/IEC 1010-1: 1990+A1/CSA C22.2 No. 1010-1: 1993
EN60825-1: 1994/IEC 825-1: 1993
Class 1 Low Voltage Directive
72/23/EEC

Accessories Supplied

Power Sensor Cable

11730A: E4418B has one 1.5 meter (5 ft) sensor cable. E4419B has two 1.5 meter (5 ft) sensor cables.

Power cord: One 2.4 meter (7.5 ft) cable. Power plug matches destination requirements.

1. Characteristics describe product performance that is useful in the application of the product, but is not covered by the product warranty.

Options Available

Option 001: Supplies internal rechargeable battery.

Option 002: Supplies parallel rear panel sensor input(s). (Power reference calibrator output on front panel only.)

Option 003: Supplies parallel rear panel sensor input(s) and moves power reference calibrator output to rear panel.

Option 004: Deletes the 11730A sensor cable(s) provided. (Order the desired cable listed in Accessories Available section.)

Option 0B0: Deletes the manual set.

Option 908: Rackmount kit (capable of holding one instrument).

Option 909: Rackmount kit (capable of holding two instruments).

Option 915: Provides the service manual.

Option 916: Provides an extra user's guide and programming guide.

Option A6J: Provides ANSI/NCSL Z540-1-1994 certificate of calibration with data.

Option OBV: Provides service documentation to component level.

Accessories Available

Power Sensor Cables:

11730A: 1.5 meters (5 ft).

11730B: 3 meters (10 ft).

11730C: 6.1 meters (20 ft).

11730D: 15.2 meters (50 ft).

11730E: 30.5 meters (100 ft).

11730F: 61 meters (200 ft).

34131A: Hard transit case

34141A: Yellow soft carry/operating case

34161A: Accessory pouch

34397A (Option OE3): 12Vdc to 115Vac (230Vac) inverter

E9287A: Spare battery²

Complementary Equipment

11683A Range Calibrator:

Verifies the accuracy and linearity of the EPM series power meters. Outputs corresponding to meter readings of 3, 10, 30, 100 and 300 μ W and 1, 3, 10, 30 and 100 mW are provided. Calibration uncertainty is $\pm 0.25\%$ on all ranges.

Warranty and Extended Warranty

Included with each EPM series power meter³ is a standard three-year return-to-Agilent Technologies service warranty. The E-series and 8480 series sensors have a one-year return-to-Agilent Technologies service warranty. Support options to extend warranty or cover periodic calibrations are available. For more information, contact your local sales and service office.

2. Only for EPM series power meters with Option 001 installed.

3. For option 001, the 3 year warranty does not apply to the E9287A battery pack.

E-series Power Sensor Specifications

The E-series of power sensors have their Calibration Factors stored in EEPROM and operate over a wide dynamic range. They are designed for use with the EPM series of power meters and two classes of sensors are available:

- CW power sensors (E4412A and E4413A).
- Average power sensors (E9300 sensors).

E-Series CW Power Sensor Specifications

Wide Dynamic Range CW Sensors: 100 pW to 100 mW (-70 dBm to +20 dBm).

Table 6

| Model | Frequency Range | Maximum SWR | Maximum Power | Connector Type |
|--------|-------------------|--|------------------|----------------|
| E4412A | 10 MHz – 18 GHz | *10 MHz to 30 MHz: 1.12 30 MHz to 2 GHz:1.15 2 GHz to 6 GHz:1.17 6 GHz to 11 GHz:1.2 11 GHz to 18 GHz:1.27 | 200 mW (+23 dBm) | Type-N (m) |
| E4413A | 50 MHz – 26.5 GHz | 50 MHz to 100 MHz: 1.21 100 MHz to 8 GHz:1.19 8 GHz to 18 GHz:1.21 18 GHz to 26.5 GHz:1.26 | 200 mW (+23 dBm) | APC-3.5mm (m) |

* applies to sensors with serial prefix US 3848 or greater

Power Linearity

Table 7

| Power | Temperature (25 °C ±5 C) | Temperature (0 to 55 °C) |
|---|--------------------------|--------------------------|
| 100 pW to 10 mW (-70 dBm to +10 dBm) | ±3 % | ±7 % |
| 10 mW to 100 mW (+10 dBm to +20 dBm) | ±4.5 % | ±10 % |

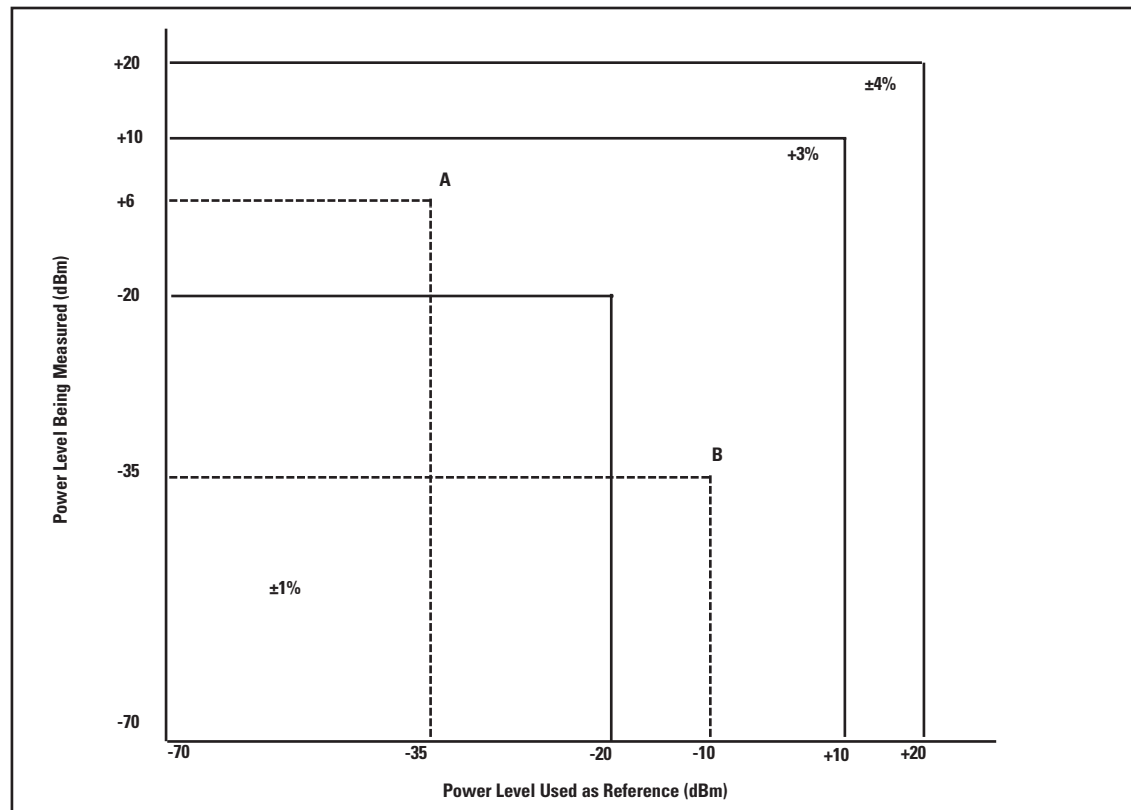


Figure 1 : Relative Mode Power Measurement Linearity with EPM series power meter/E-series CW power sensor at 25°C±5°C (typical)

The chart in Figure 1 shows the typical uncertainty in making a relative power measurement, using the same power meter channel and the same power sensor to obtain the reference and the measured values. Example A illustrates a relative gain (amplifier measurement). Example B illustrates a relative loss (insertion loss measurement). This chart assumes negligible change in frequency and mismatch occur when transitioning from the power level used as the reference to the power level being measured.

Example A:

$P = 10(P)/10 \times 1 \text{ mW}$
 $P = 10 \text{ 6}/10 \times 1 \text{ mW}$
 $P = 3.98 \text{ mW}$
 $3\% \times 3.98 \text{ mW} = 119.4 \text{ }\mu\text{W}$
 (where P = power in Watts,
 and (P) = power in dBm)

Example B:

$P = 10 (P)/10 \times 1 \text{ mW}$
 $P = 10 \text{ -35}/10 \times 1 \text{ mW}$
 $P = 316 \text{ nW}$
 $3\% \times 316 \text{ nW} = 9.48 \text{ nW}$

General

Dimensions:

E4412A:
 130 mm L x 38 mm W x 30 mm H
 (5.1 in x 1.5 in x 1.2 in)

E4413A:
 102 mm L x 38 mm W x 30 mm H
 (4 in x 1.5 in x 1.2 in)

Weight:

E4412A: 0.18 kg (0.4 lb).
 E4413A: 0.18 kg (0.4 lb).

Calibration Factor (CF) and Reflection Coefficient (Rho)

Calibration Factor and Reflection Coefficient data are provided at 1 GHz increments on a data sheet included with the power sensor. This data is unique to each sensor. If you have more than one sensor, match the serial number on the data sheet with the serial number on the power sensor you are using. The CF corrects for the frequency response of the sensor. The EPM power meter automatically reads the CF data stored in the sensor and uses it to make the corrections. For power levels greater than 0 dBm, add 0.5%/dB to the calibration factor uncertainty specification.

Reflection Coefficient (Rho) relates to the SWR according to the following formula: $SWR = 1 + Rho/1 - Rho$

Maximum uncertainties of the CF data are listed in Table 8a, for the E4412A power sensor, and Table 8b for the E4413A power sensor. The uncertainty analysis for the calibration of the sensors was done in accordance with the ISO/TAG4 Guide. The uncertainty data reported on the calibration certificate is the expanded uncertainty with a 95% confidence level and a coverage factor of 2.

Table 8a

E4412A Calibration Factor Uncertainty at 1mW (0dBm)

| Frequency | Uncertainty (%) |
|-----------|-----------------|
| 10 MHz | 1.8 |
| 30 MHz | 1.8 |
| 50 MHz | Reference |
| 100 MHz | 1.8 |
| 1.0 GHz | 1.8 |
| 2.0 GHz | 2.4 |
| 4.0 GHz | 2.4 |
| 6.0 GHz | 2.4 |
| 8.0 GHz | 2.4 |
| 10.0 GHz | 2.4 |
| 11.0 GHz | 2.4 |
| 12.0 GHz | 2.4 |
| 14.0 GHz | 2.4 |
| 16.0 GHz | 2.6 |
| 18.0 GHz | 2.6 |

Table 8b

E4413A Calibration Factor Uncertainty at 1mW (0dBm)

| Frequency | Uncertainty (%) |
|-----------|-----------------|
| 50 MHz | Reference |
| 100 MHz | 1.8 |
| 1.0 GHz | 1.8 |
| 2.0 GHz | 2.4 |
| 4.0 GHz | 2.4 |
| 6.0 GHz | 2.4 |
| 8.0 GHz | 2.4 |
| 10.0 GHz | 2.6 |
| 11.0 GHz | 2.6 |
| 12.0 GHz | 2.8 |
| 14.0 GHz | 2.8 |
| 16.0 GHz | 2.8 |
| 17.0 GHz | 2.8 |
| 18.0 GHz | 2.8 |
| 20.0 GHz | 3 |
| 22.0 GHz | 3 |
| 24.0 GHz | 3 |
| 26.0 GHz | 3 |
| 28.0 GHz | 3 |

E-series E9300 Average Power Sensor Specifications

The E-series E9300 wide dynamic range, average power sensors are designed for use with the EPM family of power meters. These specifications are valid ONLY after proper calibration of the power meter and apply for CW signals unless otherwise stated.

Specifications apply over the temperature range 0 °C to 55 °C unless otherwise stated, and specifications quoted over the temperature range 25 °C ±10 °C, conform to the standard environmental test conditions as defined in TIA/EIA/ IS-97-A and TIA/EIA/IS-98-A [1].

The E-series E9300 power sensors have two independent measurement paths (high and low power paths):

High Power Path: -10 to +20 dBm ("A" suffix sensors), +20 to +44 dBm ("B" suffix sensors) and 0 to +30 dBm ("H" suffix sensors).

Low Power Path: -60 to -10 dBm ("A" suffix sensors), -30 to +20 dBm ("B" suffix sensors) and -50 to 0 dBm ("H" suffix sensors).

Some specifications are detailed for an individual measurement path.

Wide Dynamic Range (-60 to +20 dBm) Sensors

Table 9

| Model | Frequency Range | Maximum SWR (25 °C ± 10 °C) | Maximum SWR (0 – 55 °C) | Maximum Power | Connector Type |
|--------|-------------------|--|--|--|----------------|
| E9300A | 10 MHz - 18.0 GHz | 10 MHz to 30 MHz: 1.15 30 MHz to 2 GHz: 1.13 2 GHz to 14 GHz: 1.19 14 GHz to 16 GHz: 1.22 16 GHz to 18 GHz: 1.26 | 10 MHz to 30 MHz: 1.21 30 MHz to 2 GHz: 1.15 2 GHz to 14 GHz: 1.20 14 GHz to 16 GHz: 1.23 16 GHz to 18 GHz: 1.27 | +25 dBm average; +33 dBm peak (< 10 usec) | Type- N (m) |
| E9301A | 10 MHz - 6.0 GHz | 10 MHz to 30 MHz: 1.15 30 MHz to 2 GHz: 1.13 2 GHz to 6 GHz: 1.19 | 10 MHz to 30 MHz: 1.21 30 MHz to 2 GHz: 1.15 2 GHz to 6 GHz: 1.20 | +25 dBm average; +33 dBm peak (< 10 usec) | Type- N (m) |
| E9304A | 9 kHz - 6.0 GHz | 9 kHz to 2 GHz: 1.13 2 GHz to 6 GHz: 1.19 | 9 kHz to 2 GHz: 1.15 2 GHz to 6 GHz: 1.20 | +25 dBm average; +33 dBm peak (< 10 usec) | Type- N (m) |


Wide Dynamic Range (-30 to +44 dBm) Sensors

| Model | Frequency Range | Maximum SWR (25 °C ± 10 °C) | Maximum SWR (0 – 55 °C) | Maximum Power | Connector Type |
|--------|-------------------|--|--|---|----------------|
| E9300B | 10 MHz – 18.0 GHz | 10 MHz to 8 GHz: 1.12 8 to 12.4 GHz: 1.17 12.4 to 18 GHz: 1.24 | 10 MHz to 8 GHz: 1.14 8 to 12.4 GHz: 1.18 12.4 to 18 GHz: 1.25 | 0 – 35°C: 30 W avg 35 – 55°C: 25 W avg <6 GHz: 500 W pk >6 GHz: 125 W pk 500 W-µS per pulse | Type-N (m) |
| E9301B | 10 MHz – 6.0 GHz | 10 MHz to 6 GHz: 1.12 | 10 MHz to 6 GHz: 1.14 | 0 – 35°C: 30 W avg 35 – 55°C: 25 W avg <6 GHz: 500 W pk 500 W-µS per pulse | Type-N (m) |


Wide Dynamic Range (-50 to +30 dBm) Sensors

| Model | Frequency Range | Maximum SWR (25 °C ± 10 °C) | Maximum SWR (0 – 55 °C) | Maximum Power | Connector Type |
|--------|-------------------|--|--|--|----------------|
| E9300H | 10 MHz – 18.0 GHz | 10 MHz to 8 GHz: 1.15 8 to 12.4 GHz: 1.25 12.4 to 18 GHz: 1.28 | 10 MHz to 8 GHz: 1.17 8 to 12.4 GHz: 1.26 12.4 to 18 GHz: 1.29 | 3.16 W avg 100 W pk 100 W-µS per pulse | Type-N (m) |
| E9301H | 10 MHz – 6.0 GHz | 10 MHz to 6 GHz: 1.15 | 10 MHz to 6 GHz: 1.17 | 3.16 W avg 100 W pk 100 W-µS per pulse | Type-N (m) |


Typical SWR, 10 MHz to 18 GHz, (25 °C ± 10 °C) for E9300A and E9301A sensors

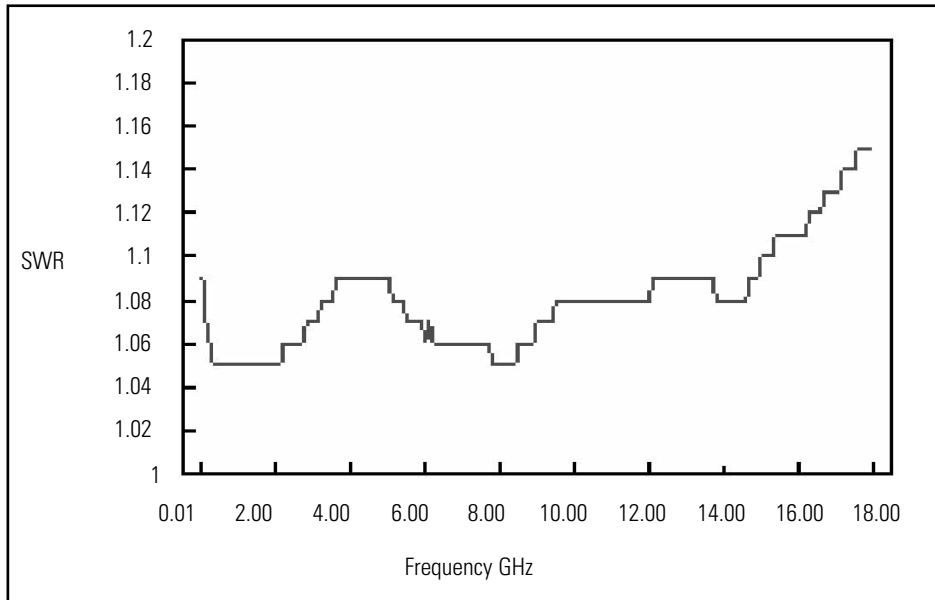


Typical SWR, 9kHz to 6 GHz, (25 °C ± 10 °C) for E9304A sensors

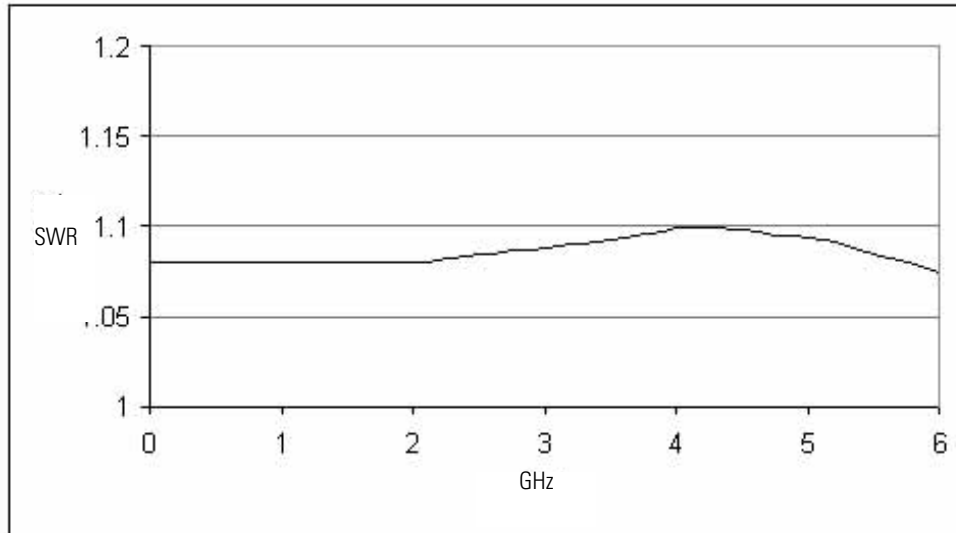

Typical SWR, 10 MHz to 18 GHz, (25 °C ± 10 °C) for E9300B and E9301B sensors

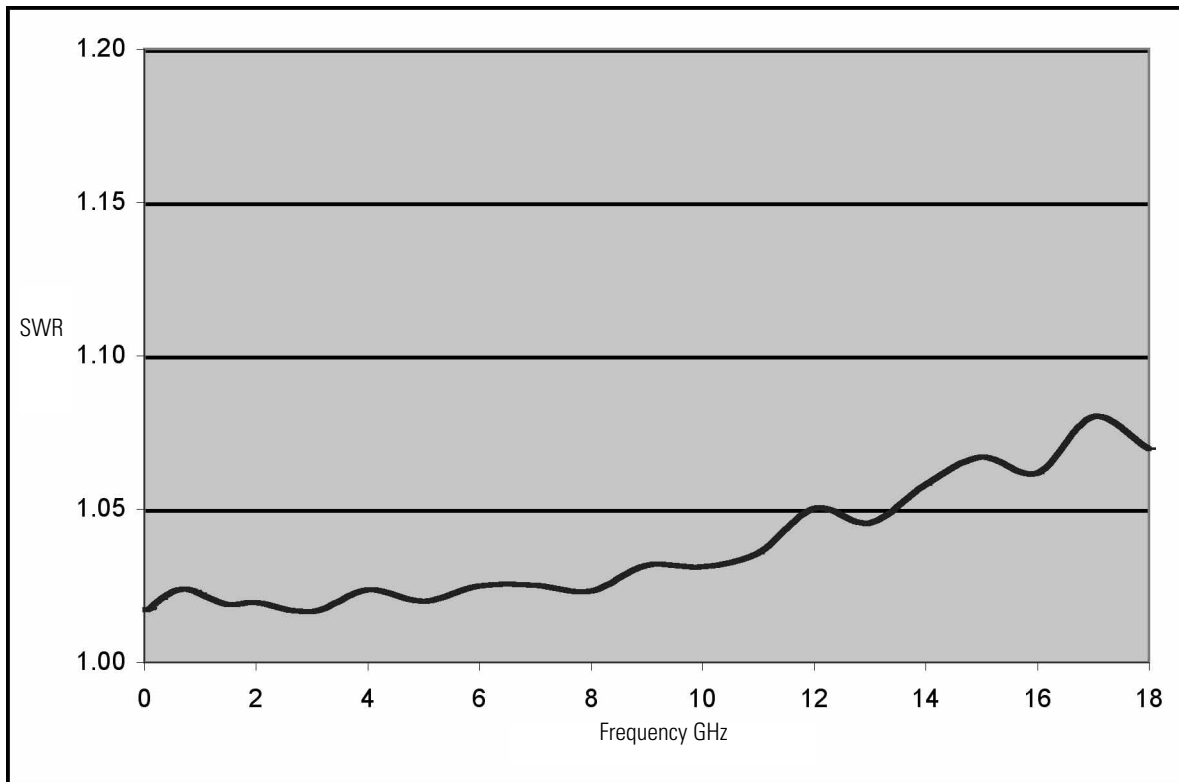

Typical SWR, 10 MHz to 18 GHz, (25 °C ± 10 °C) for E9300H and E9301H sensors

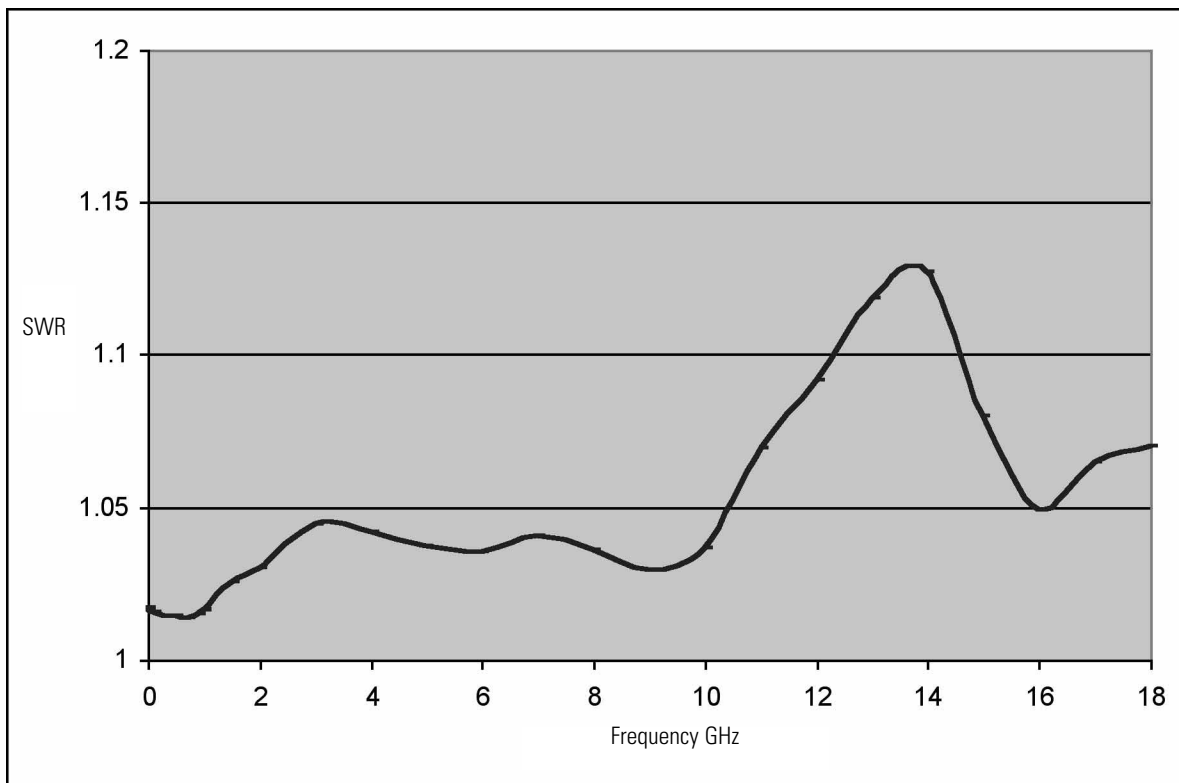


E-Series E9300 Average Power Sensors

Power Linearity (after zero and cal at ambient environmental conditions)

Table 10

| Sensor | Power | Linearity (25 °C ± 10 °C) | Linearity (0 – 55 °C) |
|--------------------------|----------------|------------------------------|--------------------------|
| E9300A, E9301A E9304A | -60 to -10 dBm | ±3.0% | ±3.5% |
| | -10 to 0 dBm | ±2.5% | ±3.0% |
| | 0 to +20 dBm | ±2.0% | ±2.5% |
| E9300B, E9301B | -30 to +20 dBm | ±3.5% | ±4.0% |
| | +20 to +30 dBm | ±3.0% | ±3.5% |
| | +30 to +44 dBm | ±2.5% | ±3.0% |
| E9300H, E9301H | -50 to 0 dBm | ±4.0% | ±5.0% |
| | 0 to +10 dBm | ±3.5% | ±4.0% |
| | +10 to +30 dBm | ±3.0% | ±3.5% |


Typical E9300A/01A/04A Power Linearity at 25 °C, after zero and calibration, with associated Measurement Uncertainty

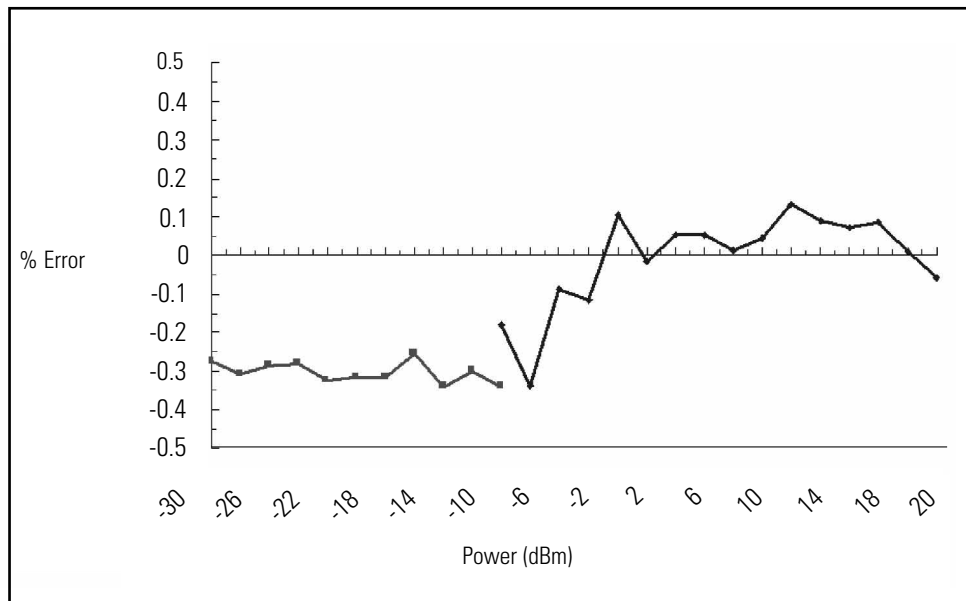

| Power Range | -30 to -20 dBm | -20 to -10 dBm | -10 to 0 dBm | 0 to +10 dBm | +10 to +20 dBm |
|-------------------------|----------------|----------------|--------------|--------------|----------------|
| Measurement Uncertainty | ±0.9% | ±0.8% | ±0.65% | ±0.55% | ±0.45% |


E-Series E9300 Average Power Sensors

Typical E9300B/01B Power Linearity at 25 °C, after zero and calibration, with associated Measurement Uncertainty

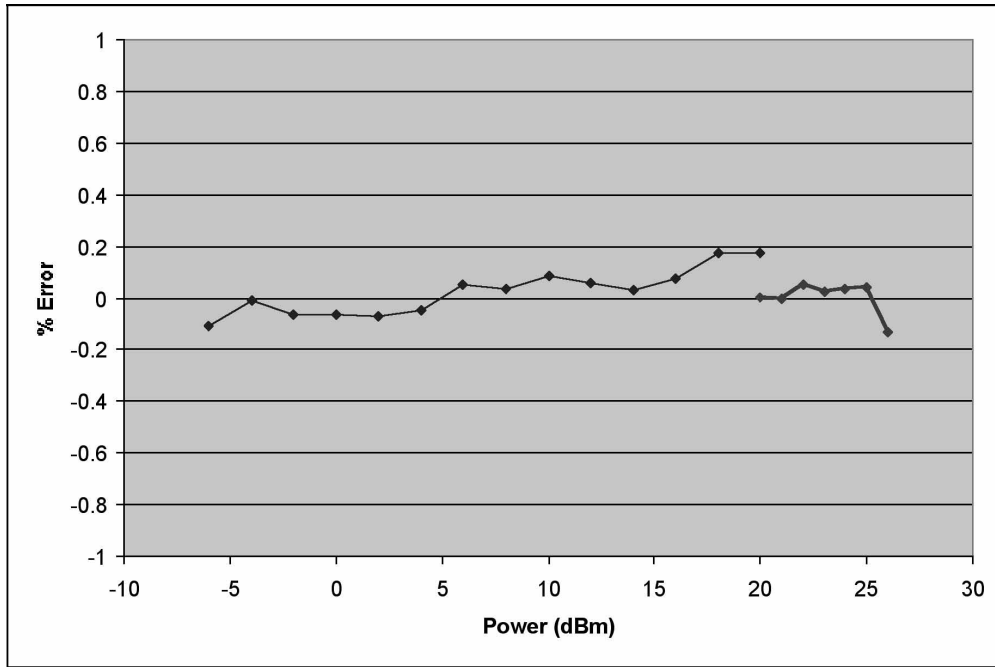

| Power Range | -6 to 0 dBm | 0 to +10 dBm | +10 to +20 dBm | +20 to +26 dBm |
|-------------------------|-------------|--------------|----------------|----------------|
| Measurement Uncertainty | ± 0.65% | ± 0.55% | ± 0.45% | ± 0.31% |

Typical E9300H/01H Power Linearity at 25 °C, after zero and calibration, with associated Measurement Uncertainty

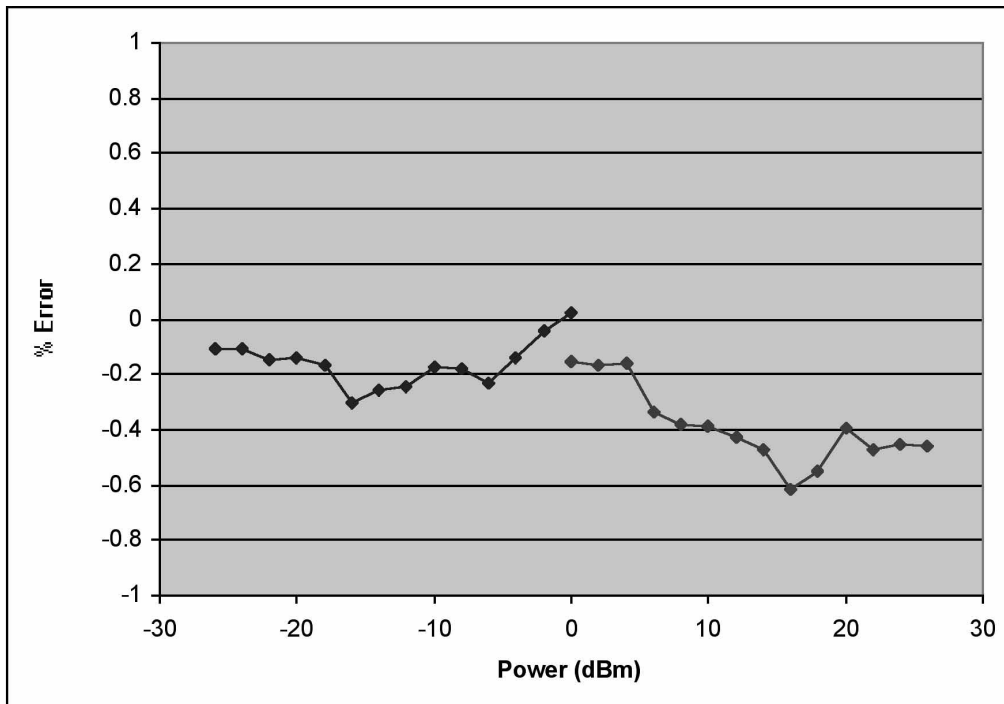

| Power Range | -26 to -20 dBm | -20 to -10 dBm | -10 to 0 dBm | 0 to +10 dBm | +10 to +20 dBm | +20 to +26 dBm |
|-------------------------|----------------|----------------|--------------|--------------|----------------|----------------|
| Measurement Uncertainty | ± 0.9% | ± 0.8% | ± 0.65% | ± 0.55% | ± 0.45% | ± 0.31% |

Note: If the temperature changes after calibration and you choose not to re-calibrate the sensor, the following additional Power Linearity error should be added to the linearity specs in Table 10:

The typical maximum additional Power Linearity error due to temperature change after calibration, for small changes in temperature, is $\pm 0.15\%/^{\circ}\text{C}$ (valid after zeroing the sensor).

For large changes in temperature, refer to Table 11.

Typical maximum additional Power Linearity error due to temperature change after calibration at 25 °C for any change in temperature (valid after zeroing the sensor)

Table 11

| Sensor | Power | Additional Power Linearity error (25 °C \pm 10 °C) | Additional Power Linearity error (0 – 55 °C) |
|--------------------------|----------------|--|--|
| E9300A, E9301A E9304A | -60 to -10 dBm | $\pm 1.5\%$ | $\pm 2.0\%$ |
| | -10 to 0 dBm | $\pm 1.5\%$ | $\pm 2.5\%$ |
| | 0 to +20 dBm | $\pm 1.5\%$ | $\pm 2.0\%$ |
| E9300B, E9301B | -30 to +20 dBm | $\pm 1.5\%$ | $\pm 2.0\%$ |
| | +20 to +30 dBm | $\pm 1.5\%$ | $\pm 2.5\%$ |
| | +30 to +44 dBm | $\pm 1.5\%$ | $\pm 2.0\%$ |
| E9300H, E9301H | -50 to 0 dBm | $\pm 1.5\%$ | $\pm 2.0\%$ |
| | 0 to +10 dBm | $\pm 1.5\%$ | $\pm 2.5\%$ |
| | +10 to 30 dBm | $\pm 1.5\%$ | $\pm 2.0\%$ |

Figure 2; Relative Mode Power Measurement Linearity with an EPM series power meter, at 25 °C ± 10 °C (typical):

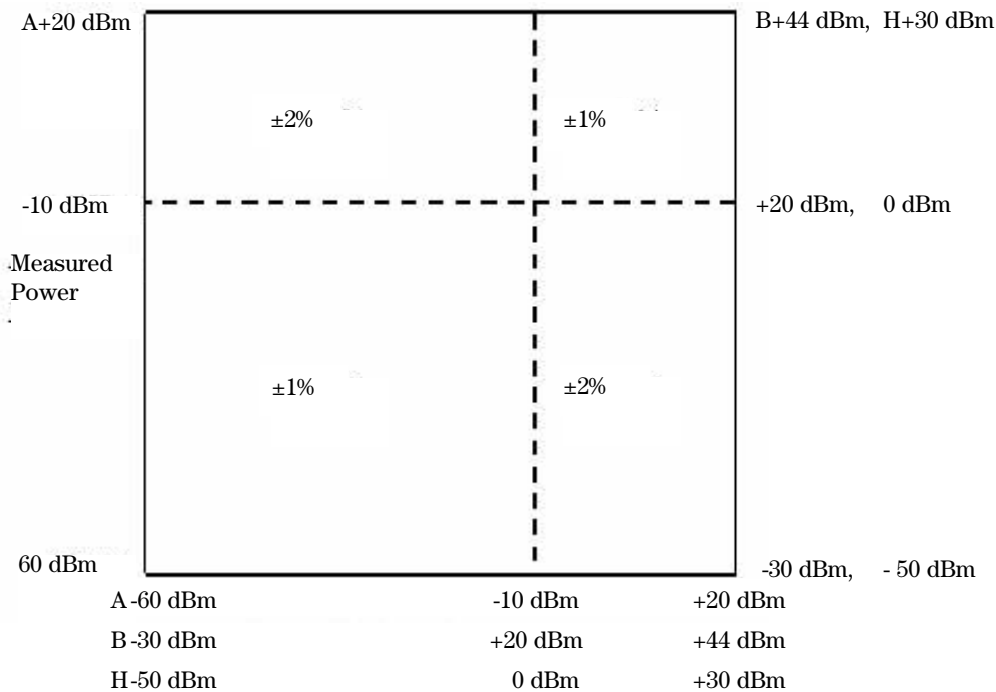


Figure 2 shows the typical uncertainty in making a relative power measurement, using the same power meter channel and same power sensor to obtain the reference and the measured values, and assumes that negligible change in frequency and mismatch error occur when transitioning from the power level used as the reference to the power level being measured.

E-Series E9300 Average Power Sensors

Switch Point Data:

The E9300 power sensors have two paths, a low power path covers: -60 to -10 dBm ("A" suffix sensors), -30 to +20 dBm ("B" suffix sensors), and -50 to 0 dBm ("H" suffix sensors). The high power path covers: -10 to +20 dBm ("A" suffix sensors), +20 to +44 dBm ("B" suffix sensors), and 0 to +30 dBm ("H" suffix sensors). The power meter automatically selects the proper power level path. To avoid unnecessary switching when the power level is near the switch point, Switching Point Hysteresis has been added.

E9300 "A" suffix sensors example: Hysteresis causes the low power path to remain selected until approximately -9.5 dBm as the power level is increased, above this power the high power path will be selected. The high power path will remain selected until approximately -10.5 dBm is reached as the signal level decreases, below this power the low power path will be selected.

Switching Point Linearity: Typically $\leq \pm 0.5\%$ ($\leq \pm 0.02$ dB)

Switching Point Hysteresis: 0.5 dB typical

Table 12, E9300A, E9301A, and E9304A sensors Zero and Measurement Noise

| Conditions ⁽¹⁾ | Zero Set | Zero Drift (2) | Measurement Noise ⁽³⁾ |
|---------------------------------|----------|----------------|----------------------------------|
| Low Power Path (15% to 75% RH) | 500 pW | 150 pW | 700 pW |
| Low Power Path (75% to 95% RH) | 500 pW | 4,000 pW | 700 pW |
| High Power Path (15% to 75% RH) | 500 nW | 150 nW | 500 nW |
| High Power Path (75% to 95% RH) | 500 nW | 3 nW | 500 nW |

E9300B and E9301B sensors

| Conditions ⁽¹⁾ | Zero Set | Zero Drift (2) | Measurement Noise ⁽³⁾ |
|---------------------------------|-------------|----------------|----------------------------------|
| Low Power Path (15% to 75% RH) | 500 nW | 150 nW | 700 nW |
| Low Power Path (75% to 95% RH) | 500 nW | 4 μ W | 700 nW |
| High Power Path (15% to 75% RH) | 500 μ W | 150 μ W | 500 μ W |
| High Power Path (75% to 95% RH) | 500 μ W | 3 mW | 500 μ W |

E9300H and E9301H sensors

| Conditions ⁽¹⁾ | Zero Set | Zero Drift (2) | Measurement Noise ⁽³⁾ |
|---------------------------------|-----------|----------------|----------------------------------|
| Low Power Path (15% to 75% RH) | 5 nW | 1.5 nW | 7 nW |
| Low Power Path (75% to 95% RH) | 5 nW | 40 nW | 7 nW |
| High Power Path (15% to 75% RH) | 5 μ W | 1.5 μ W | 5 μ W |
| High Power Path (75% to 95% RH) | 5 μ W | 30 μ W | 5 μ W |

1. RH is the abbreviation for Relative Humidity.

2. Within 1 hour after zero set, at a constant temperature, after a 24-hour warm-up of the power meter with power sensor connected.

3. The number of averages at 16 for Normal mode and 32 for x2 mode, at a constant temperature, measured over a one minute interval and two standard deviations.

Calibration Factor (CF) and Reflection Coefficient (Rho)

Calibration Factor and Reflection Coefficient data are provided at frequency intervals on a data sheet included with the power sensor. This data is unique to each sensor. If you have more than one sensor, match the serial number on the data sheet with the serial number on the power sensor you are using. The CF corrects for the frequency response of the sensor. The EPM series power meter automatically reads the CF data stored in the sensor and uses it to make the corrections.

Reflection Coefficient (Rho) relates to the SWR according to the following formula:

$$SWR = (1 + Rho)/(1 - Rho)$$

Maximum uncertainties of the CF data are listed in Tables 13A and 13B. As the E-series E9300 power sensors have two independent measurement paths (high and low power paths), there are two calibration factor uncertainty tables. The uncertainty analysis for the calibration of the sensors was done in accordance with the ISO Guide. The uncertainty data reported on the calibration certificate is the expanded uncertainty with a 95% confidence level and a coverage factor of 2.

Calibration Factor Uncertainties (Low Power Path)

Table 13A

| Frequency | Uncertainty (%) (25 OC +10 OC) | Uncertainty (%) (0 to 55 OC) |
|---|-----------------------------------|---------------------------------|
| 10 MHz to 30 MHz | ± 1.8 % | ± 2.2 % |
| 30 MHz to 500 MHz (E9304A: 9kHz to 500MHz) | ± 1.6 % | ± 2.0 % |
| 500 MHz to 1.2 GHz | ± 1.8 % | ± 2.5 % |
| 1.2 GHz to 6 GHz | ± 1.7 % | ± 2.0 % |
| 6 GHz to 14 GHz | ± 1.8 % | ± 2.0 % |
| 14 GHz to 18 GHz | ± 2.0 % | ± 2.2 % |

Calibration Factor Uncertainties (High Power Path)

Table 13B

| Frequency | Uncertainty (%) (25 OC +10 OC) | Uncertainty (%) (0 to 55 OC) |
|---|-----------------------------------|---------------------------------|
| 10 MHz to 30 MHz | ± 2.1 % | ± 4.0 % |
| 30 MHz to 500 MHz (E9304A: 9kHz to 500MHz) | ± 1.8 % | ± 3.0 % |
| 500 MHz to 1.2 GHz | ± 2.3 % | ± 4.0 % |
| 1.2 GHz to 6 GHz | ± 1.8 % | ± 2.1 % |
| 6 GHz to 14 GHz | ± 1.9 % | ± 2.3 % |
| 14 GHz to 18 GHz | ± 2.2 % | ± 3.3 % |

General

Dimensions: Length 130 mm, Width 38 mm, Height 30 mm

Weight: 0.18 kg (0.4 lbs)

References:

[1] TIA is the Telecommunications Industry Association; EIA is the Electronic Industries Association.

TIA/EIA/IS-97-A is the Recommended Minimum Performance Standards for Base Stations Supporting Dual-Mode Wideband Spread Spectrum Cellular Mobile Stations.

TIA/EIA/IS-98-A is the Recommended Minimum Performance Standards for Dual-Mode Wideband Spread Spectrum Cellular Mobile Stations.

8480 Series Power Sensors (with EPM series power meters)

The 8480 series power sensors are designed for use with the 435B, 436A, 437B, 438A, 70100A, E1416A and now the E4418B and E4419B power meters. These thermocouple and diode power sensors provide extraordinary accuracy, stability, and SWR over a wide range of frequencies (100 kHz to 110 GHz) and power levels -70 dBm to +44 dBm).

Table 14
Root Sum of Squares (rss)
uncertainty on the calibration
factor data printed on the power
sensor.

| Freq (MHz) | 8482A | 8482B | 8482H | 8483A |
|------------|---------|-------|---------|---------|
| 0.1 | 1.3 | 2.8 | 1.6 | 1.5 |
| 0.3 | 1.2 | 2.8 | 1.6 | 1.4 |
| 1 | 1.2 | 2.8 | 1.6 | 1.4 |
| 3 | 1.2 | 2.8 | 1.6 | 1.4 |
| 10 | 1.3 | 2.8 | 1.6 | 1.6 |
| 30 | 1.4 | 2.8 | 1.7 | 1.6 |
| 50 | 0 (ref) | 2.7 | 0 (ref) | 0 (ref) |
| 100 | 1.6 | 3.3 | 1.9 | 2 |
| 300 | 1.6 | 3.3 | 1.9 | 2 |
| 1000 | 1.4 | 3.3 | 1.7 | 2 |
| 2000 | 1.4 | 3.3 | 1.7 | 2.1 |
| 4000 | 1.5 | 3.1 | 1.8 | - |

| Freq (GHz) | 8481A | 8481B | 8481H | 8481D | 8485A | 8385D | 8487A | 8487D |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1 | 1.6 | 3 | 1.9 | 1.9 | 1.6 | 1.8 | 1.6 | 2 |
| 2 | 1.4 | 3.1 | 1.7 | 1.8 | 1.6 | 1.8 | 1.6 | 2 |
| 4 | 1.5 | 3.1 | 1.8 | 1.8 | 1.7 | 1.8 | 1.6 | 2 |
| 6 | 1.5 | 3.1 | 1.8 | 1.8 | 1.8 | 2.1 | 1.7 | 2.3 |
| 8 | 1.7 | 3.2 | 2 | 2 | 1.9 | 2.2 | 1.8 | 2.3 |
| 10 | 1.9 | 3.3 | 2.2 | 2.2 | 2 | 2.1 | 1.8 | 2.3 |
| 12 | 2.1 | 4.1 | 2.4 | 2.8 | 2 | 2.2 | 1.9 | 2.3 |
| 14 | 2.6 | 4.1 | 2.8 | 3.2 | 2.2 | 2.2 | 2.1 | 2.8 |
| 16 | 2.9 | 4.2 | 3 | 3.4 | 2.3 | 2.5 | 2.2 | 2.8 |
| 18 | 3.2 | 4.3 | 3.1 | 3.7 | 2 | 2.6 | 2.3 | 2.8 |
| 22 | - | - | - | - | 2.1 | 2 | 1.8 | 2.8 |
| 26.5 | - | - | - | - | 2.1 | 2.3 | 2.1 | 2.8 |

| Freq (GHz) | R8486A | Q8486A | R8486D | Q8486D | 8487A | 8487D |
|------------|--------|--------|--------|--------|-------|-------|
| 26.5 | 2.2 | - | 3 | - | 2.1 | 2.8 |
| 28 | 2.4 | - | 3.2 | - | 2.3 | 3 |
| 30 | 2.5 | - | 3 | - | 2.1 | 3 |
| 33 | 2.1 | 2.8 | 3 | 4.2 | 2.3 | 3 |
| 34.5 | 2.1 | 2.8 | 3 | 4.2 | 2.1 | 3 |
| 37 | 2.2 | 2.8 | 3 | 4.2 | 2.3 | 3 |
| 40 | 2.2 | 2.9 | 3 | 4.2 | 2.6 | 3 |
| 42 | - | 3.9 | - | 4.9 | 3.2 | 2.9 |
| 44 | - | 3.9 | - | 5.1 | 3.6 | 2.9 |
| 46 | - | 3.9 | - | 5.5 | 4.1 | 3.1 |
| 48 | - | 4.9 | - | 5.8 | 4.5 | 4.5 |
| 50 | - | 5.3 | - | 6.2 | 5 | 4.5 |

8480 Series Sensors (with EPM series power meters)

25 Watt Sensors, 1 mW to 25 W (0 dBm to +44 dBm)

Table 15

| Model | Frequency Range | Maximum SWR | Power Linearity ⁽¹⁾ | Maximum Power | Connector Type | Weight |
|--------------|--------------------|--|--------------------------------|---|----------------|---|
| 8481B | 10 MHz to 18 GHz | 10 MHz to 2 GHz: 1.10 2 GHz to 12.4 GHz: 1.18 12.4 GHz to 18 GHz: 1.28 | +35 dBm to +44 dBm: (±4%) | 0° C to 35° C: 30W avg ⁽²⁾ 35° C to 550 C: 25W avg 0.01 to 5.8 GHz: 500W pk 5.8 to 18 GHz: 125 W pk 500 W.µs per pulse | Type - N(m) | Net: 0.8 kg (1.75 lb) Shipping: 1.5 kg (3.25 lb) |
| 8482B | 100 kHz to 4.2 GHz | 100 kHz to 2 GHz: 1.10 2 GHz to 4.2 GHz: 1.18 | +35 dBm to +44 dBm: (±4%) | 0° C to 35° C: 30W avg ⁽²⁾ 35° C to 55° C: 25W avg 0.01 to 5.8 GHz: 500W pk 5.8 to 18 GHz: 125 W pk 500 W - µs per pulse | Type - N(m) | Net: 0.8 kg (1.75 lb) Shipping: 1.5 kg (3.25 lb) |

3 Watt Sensors, 100 µW to 3 W (-10 dBm to +35 dBm)

| Model | Frequency Range | Maximum SWR | Power Linearity ⁽¹⁾ | Maximum Power | Connector Type | Weight |
|--------------|--------------------|--|--------------------------------|---|----------------|--|
| 8481H | 10 MHz to 18 GHz | 10 MHz to 8 GHz: 1.20 8 GHz to 12.4 GHz: 1.25 12.4 GHz to 18 GHz: 1.30 | +25 dBm to +35 dBm: (±5%) | 3.5 W avg, 100 W pk 100 W.µs per pulse | Type - N (m) | Net: 0.2 kg (0.38 lb) Shipping: 0.5 kg (1.0 lb) |
| 8482H | 100 kHz to 4.2 GHz | 100 kHz to 4.2 GHz: 1.20 | +25 dBm to +35 dBm: (±5%) | 3.5 W avg, 100 W pk 100 W.µs per pulse | Type - N (m) | Net: 0.2 kg (0.38 lb) Shipping: 0.5 kg (1.0 lb) |

100 mW Sensors, 1 µW to 100 mW (-30 dBm to +20 dBm)

| Model | Frequency Range | Maximum SWR | Power Linearity ⁽¹⁾ | Maximum Power | Connector Type | Weight |
|---------------------------|--------------------|--|--|--|------------------------------|---|
| 8485A | 50 MHz to 26.5 GHz | 50 MHz to 100 MHz: 1.15 100 MHz to 2 GHz: 1.10 2 GHz to 12.4 GHz: 1.15 12.4 GHz to 18 GHz: 1.20 18 GHz to 26.5 GHz: 1.25 | +10 dBm to +20 dBm: (±3%) | 300 mW avg, 15 W pk 30 W.µs per pulse | APC - 3.5mm(m) | Net: 0.2 kg (.38 lb) Shipping: 0.5 kg (1.0 lb) |
| Opt 033 | 50 MHz to 33 GHz | 26.5 GHz to 33 GHz: 1.40 | +10 dBm to +20 dBm: (±3%) | 300 mW avg, 15 W pk 30 W.µs per pulse | APC - 3.5mm(m) | Net: 0.2 kg (.38 lb) Shipping: 0.5 kg (1.0 lb) |
| 8481A | 10 MHz to 18 GHz | 10 MHz to 30 MHz: 1.40 30 MHz to 50 MHz: 1.18 50 MHz to 2 GHz: 1.10 2 GHz to 12.4 GHz: 1.18 12.4 GHz to 18 GHz: 1.28 | +10 dBm to +20 dBm: (±3%) | 300 mW avg, 15 W pk 30 W.µs per pulse | Type - N (m) | Net: 0.2 kg (0.38 lb) Shipping: 0.5 kg (1.0 lb) |
| 8482A | 100 kHz to 4.2 GHz | 100 kHz to 300 kHz: 1.60 300 kHz to 1 MHz: 1.20 1 MHz to 2 GHz: 1.10 2 GHz to 4.2 GHz: 1.30 | +10 dBm to +20 dBm: (±3%) | 300 mW avg, 15 W pk 30 W.µs per pulse | Type - N (m) | Net: 0.2 kg (0.38 lb) Shipping: 0.5 kg (1.0 lb) |
| 8483A (75 ohm) | 100 kHz to 2 GHz | 100 kHz to 600 kHz: 1.80 600 kHz to 2 GHz: 1.18 | +10 dBm to +20 dBm: (±3%) | 300 mW avg, 10 W pk | Type - N (m) (75 ohm) | Net: 0.2 kg (0.38 lb) Shipping: 0.5 kg (1.0 lb) |
| R8486A | 26.5 GHz to 40 GHz | 26.5 GHz to 40 GHz: 1.40 | +10 dBm to +20 dBm: (±3%) | 300 mW avg, 15 W pk 30 W.µs per pulse | Waveguide Flange UG-385/U | Net: 0.26 kg (0.53 lb) Shipping: .66 kg (1.3 lb) |
| Q8486A | 33 GHz to 50 GHz | 33 GHz to 50 GHz: 1.50 | +10 dBm to +20 dBm: (±3%) | 300 mW avg, 15 W pk 30 W.µs per pulse | Waveguide Flange UG-385/U | Net: 0.26 kg (0.53 lb) Shipping: .66 kg (1.3 lb) |
| V8486A | 50 GHz to 75 GHz | 50 GHz to 75 GHz: 1.06 | +10 dBm to +20 dBm: (±2%) -30 dBm to +10 dBm: (±1%) | 200 mW avg, 40 W pk (10.µs per pulse, 0.5% duty cycle) | Waveguide Flange UG-385/U | Net: 0.4 kg (0.9 lb) Shipping: 1 kg (2.1 lb) |
| W8486A | 75 GHz to 110 GHz | 75 GHz to 110 GHz: 1.08 | (±2%) | 200 mW avg, 40 W pk (10.µs per pulse, 0.5% duty cycle) | Waveguide Flange UG-385/U | Net: 0.4 kg (0.9 lb) Shipping: 1 kg (2.1 lb) |
| 8487A | 50 MHz to 50 GHz | 50 MHz to 100 MHz: 1.15 100 MHz to 2 GHz: 1.10 2 GHz to 12.4 GHz: 1.15 12.4 GHz to 18 GHz: 1.20 18 GHz to 26.5 GHz: 1.25 26.5 GHz to 40 GHz: 1.30 40 GHz to 50 GHz: 1.50 | +10 dBm to +20 dBm: (±3%) | 300 mW avg, 15 W pk 30 W.µs per pulse | 2.4 mm (m) | Net: 0.14 kg (.28 lb) Shipping: 0.5 kg (1.0 lb) |

8480 Series Sensors (with EPM series power meters)

High Sensitivity Sensors, 100 pW to 10 μW (-70 dBm to -20 dBm)

| Model | Frequency Range | Maximum SWR | Power Linearity (1) | Maximum Power | Connector Type | Weight |
|------------------------------|--------------------|--|--|--|------------------------------|---|
| 8481D ⁽³⁾ | 10 MHz to 18 GHz | 10 MHz to 30 MHz: 1.40 30 MHz to 3 GHz: 1.15 4 GHz to 10 GHz: 1.20 10 GHz to 15 GHz: 1.30 15 GHz to 18 GHz: 1.50 | - 30 dBm to - 20 dBm: (±1%) | 100 mW avg, 100 m W pk | Type - N (m) | Net: 0.16 kg (0.37 lb) Shipping: 0.9 kg (2.0 lb) |
| 8485D ⁽³⁾ | 50 MHz to 26.5 GHz | 0.05 GHz to 0.1 GHz: 1.19 0.1 GHz to 4 GHz: 1.15 4 GHz to 12 GHz: 1.19 12 GHz to 18 GHz: 1.25 18 GHz to 26.5 GHz: 1.29 | - 30 dBm to - 20 dBm: (±2%) | 100 mW avg, 100 m W pk | APC - 3.5mm (m) | Net: 0.2 kg (.38 lb) Shipping: 0.5 kg (1.0 lb) |
| Opt 033 | 50 MHz to 33 GHz | 26.5 GHz to 33 GHz: 1.35 | - 30 dBm to - 20 dBm: (±2%) | 100 mW avg, 100 m W pk | APC - 3.5mm (m) | Net: 0.2 kg (.38 lb) Shipping: 0.5 kg (1.0 lb) |
| 8487D ⁽³⁾ | 50 kHz to 50 GHz | 0.05 GHz to 0.1 GHz: 1.19 0.1 GHz to 4 GHz: 1.15 2 GHz to 12.4 GHz: 1.20 12.4 GHz to 18 GHz: 1.29 18 GHz to 34 GHz: 1.37 34 GHz to 40 GHz: 1.61 40 GHz to 50 GHz: 1.89 | - 30 dBm to - 20 dBm: (±2%) | 100 mW avg, 100 m W pk 30 W _{μs} per pulse | 2.4 mm (m) | Net: 0.2 kg (0.38 lb) Shipping: 0.5 kg (1.0 lb) |
| R8486D ⁽³⁾ | 26.5 GHz to 40 GHz | 26.5 GHz to 40 GHz: 1.40 | - 30 dBm to - 25 dBm: (±3%) - 25 dBm to - 20 dBm: (±5%) | 100 mW avg, or pk 40 V dc max | Waveguide Flange UG-599/U | Net: 0.26 kg (0.53 lb) Shipping: .66 kg (1.3 lb) |
| Q8486D ⁽³⁾ | 33 GHz to 50 GHz | 33 GHz to 50 GHz: 1.40 | - 30 dBm to - 25 dBm: (±3%) - 25 dBm to - 20 dBm: (±5%) | 100 mW avg, or pk 40 V dc max | Waveguide Flange UG-383/U | Net: 0.26 kg (0.53 lb) Shipping: .66 kg (1.3 lb) |

1. Negligible deviation except for those power ranges noted.
2. For pulses greater than 30 W, the maximum average power (P_a) is limited by the energy per pulse (E) in W_{μs} according to $P_a = 30-0.02 E$.
3. Includes 11708A 30 dB attenuator for calibrating against 0 dBm, 50 MHz power reference. The 11708A is factory set to 30 dB ±0.05 dB at 50 MHz, traceable to NIST. SWR <1.05 at 50 MHz.

For more information about Agilent Technologies test and measurement products, applications, services, and for a current sales office listing, visit our web site:

<http://www.agilent.com/find/tmdir>

You can also contact one of the following centers and ask for a test and measurement sales representative.

United States:

Agilent Technologies
Test and Measurement Call Center
P.O. Box 4026
Englewood, CO 80155-4026
(tel) 1 800 452 4844

Canada:

Agilent Technologies Canada Inc.
5150 Spectrum Way
Mississauga, Ontario
L4W 5G1
(tel) 1 877 894 4414

Europe:

Agilent Technologies
Test & Measurement
European Marketing Organisation
P.O. Box 999
1180 AZ Amstelveen
The Netherlands
(tel) (31 20) 547 9999

Japan:

Agilent Technologies Japan Ltd.
Call Center
9-1, Takakura-Cho, Hachioji-Shi,
Tokyo 192-8510, Japan
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:

Agilent Technologies
Latin American Region Headquarters
5200 Blue Lagoon Drive, Suite #950
Miami, Florida 33126
U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286


Australia/New Zealand:

Agilent Technologies Australia Pty Ltd
347 Burwood Highway
Forest Hill, Victoria 3131
(tel) 1-800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:

Agilent Technologies
24/F, Cityplaza One, 1111 King's Road
Taikoo Shing, Hong Kong
(tel) (852) 3197 7777
(fax) (852) 2506 9284

© Copyright Agilent Technologies 1999
All rights reserved
Technical data subject to change
Printed in U.S.A. 02/00
5965-6382E



Agilent Technologies

Innovating the HP Way