



Line Loop Tester



Available with Field Replaceable Switches

Simpson's Model 8455 Line Loop tester detects line shorts, opens and multiple ringers, DC voltages and loop resistance. It can measure DC voltage up to 100 volts and loop resistance to 2 megohms. A front panel "reverse polarity" switch allows changing polarity positions quicker and easier than manually switching test leads when making line checks. This switch is field-replaceable, enabling your loop tester to be operational at all times without costly shop repairs. The compact durable construction of this tester ensures continued accuracy even under the most rugged field conditions.

- **Field Replaceable Switches** - Allows operator to get back to the job quickly with less downtime. The replacement toggles or push buttons can be kept in the truck and replaced on site, keeping the unit in service, at all times.
- **Designed for Telecom Applications** - Accurately checks line shorts, opens and multiple ringers.
- **Wide Measuring Range** - Measures DC voltage 0-100V and resistance $R \times 1$, $R \div 10$.
- **Shorter Testing Time** - Polarity toggle switch eliminates manually switching test leads when conducting line checks.
- **Rugged for Field Use** - Durable, compact (5-1/2" x 2-3/8") construction makes it portable, easy to store and rugged.
- **Accurate, Finer Readings** - 0-100 points scale calibration yields accurate readings.



Model No. 8455

Specifications

DC Voltage:

Range: 100V

Sensitivity: Model 8455, 1K Ω per volt

Model 8455 A, 3333 Ω per volt

Isolation: 100V DC max. circuit to earth ground

Overload Protection: 10mA/250V fuse on all ranges

Temperature Coefficient: (57°F to 97°F): $\pm 2\%$ F.S. (VDC)

Battery Type: (1) Simpson 45V, Catalog Number 00865

Physical: Dimensions: 5.5" (H) x 3.6" (W) x 2.4" (D), (14 x 9 x 6 cm.)
Weight: 1 lb. (0.5 Kg.)


Specifications subject to change without notice

RESISTANCE

Model	Standard		Low Ohms	
Range	$R \times 1$	$R \div 10$	Points	Low ohms
Center Value	100K Ω	10K Ω	50 points	500 Ω
Accuracy	2° of arc		2° of full scale	2° of arc
Open Circuit Voltage (nom)	45V	45V	N/A	1.2V
Short Circuit Current (nom)	450 μ A	4.5mA	N/A	2.4mA

Ordering Information


MODEL 8455 LINE LOOP TESTER		MODEL 8455A LINE LOOP TESTER (Low Ohms Version)	
Catalog No.		Catalog No.	
Field Rep. Switch Low Ohms	40010	Field Rep. Switch Low Ohms	40011
	Yes		Yes
	No		Yes
ACCESSORIES INCLUDED			
Case	Yes	Case	Yes
Leads	Yes	Leads	Yes
Battery	Yes	Battery	Yes
Manual	Yes	Manual	Yes
OPTIONAL ACCESSORIES (RECOMMENDED)			
Case	00836	Case	00836
Leads	45001	Leads	45001
10 Pk. Replaceable Switches - Toggle	45025	10 Pk. Replaceable Switches - Toggle	45025
10 Pk. Replaceable Switches - Push Button	45026	10 Pk. Replaceable Switches - Push Button	45026



Line Loop Tester



Field Replaceable Switches Save Time - Save Money

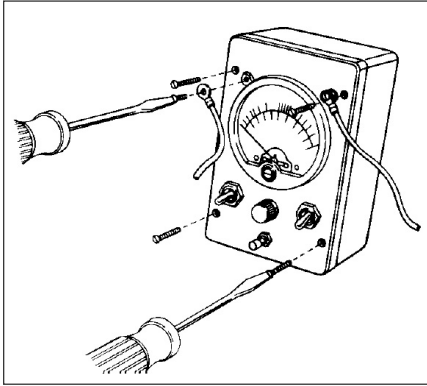

Remove the test leads and 4 screws located near the meter face from the 8455A's front cover.


Simpson's FIELD REPLACEABLE SWITCHES - replace broken switches in less time than it takes to complete a field report or repair paper work. Simpson uses the best toggle switches, with pinned toggles for longer life.

The pictorial steps to the left illustrate the simplicity of replacing a toggle switch. (Complete detailed replacement instructions are provided in both the 8455 and 8455A operator's manuals.)



Model 8455A Low Ohms Version

Includes all the features of the 8455. Select the low ohms model if measuring electrical resistance over short lines (for example, in city and suburban locations).

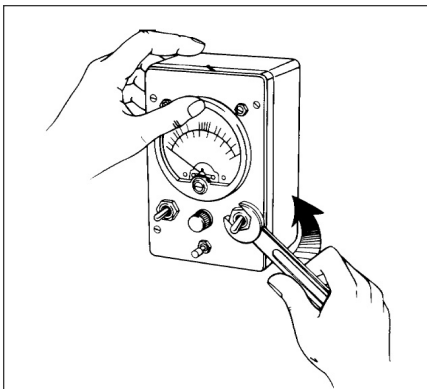

Detach the mounting nut from the defective toggle switch.


Test Leads for 8455 and 8455A

Model No. 45001

Consists of one each, red and black, flexible test leads, 6 ft. long with Telco clips at one end and ring-tongue connectors at the other end for connection to the Instrument's screw terminals



45001

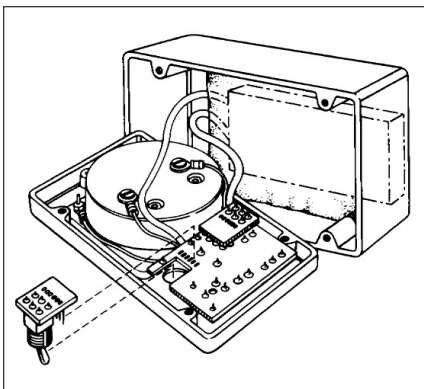

Unplug the worn cut or broken switches and plug in a new one! Total time under 5 minutes. Push-button style switches also available.

Protection for 8455 & 8455A

Simpson's foam padded, nylon water repellent case, (Model No. 00836) protects the 8455 or 8455A both in storage and during transport. Use either the case handle or adjustable nylon strap for easy carrying. The neck strap frees both hands for making measurements. The case, made of nylon mesh with an extremely dense weave and water repellent backing, safely protects unit from inclement conditions. Foam padding on sides, top and bottom safeguards unit from damage. A convenient pocket stores leads while they are attached to the instrument.



00836