


## Model 5300 BNC (F) To Triaxial 3 Lug (M)

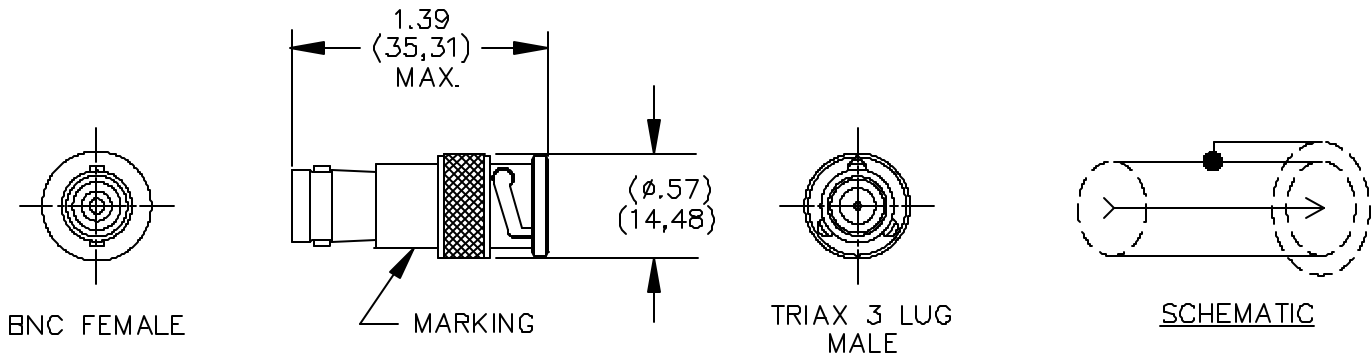

### FEATURES:

- Provides an easy interface between a BNC (M) and a 3 lug triax (F)

### MATERIALS:

Body and Fittings – Nickel Plated Brass, Male Contact – Gold Plated Brass, Female Contact – Gold Plated Beryllium Copper

Dielectric: Teflon per L-P-403

Finish: Body and Fittings: Tarnish resistant

Center & Intermediate Contacts: Gold Plated

Outer Contact: Tarnish resistant

Marking: “Pomona 5300”

### RATINGS:

Operating Voltage: Shield/Earth: 30VAC/60VDC Max. For hands free testing in a controlled Voltage Environment: 500 VDC.

Frequency Range: DC to 500 MHz.

**ORDERING INFORMATION:** Model 5300