



KONICA MINOLTA


# Display Color Analyzer CA-310 11

Support for LED backlights

*The next-generation model that surpasses the CA-210*

*For high-speed, high-accuracy measurements  
of LED-backlit LCD TVs*


LED television

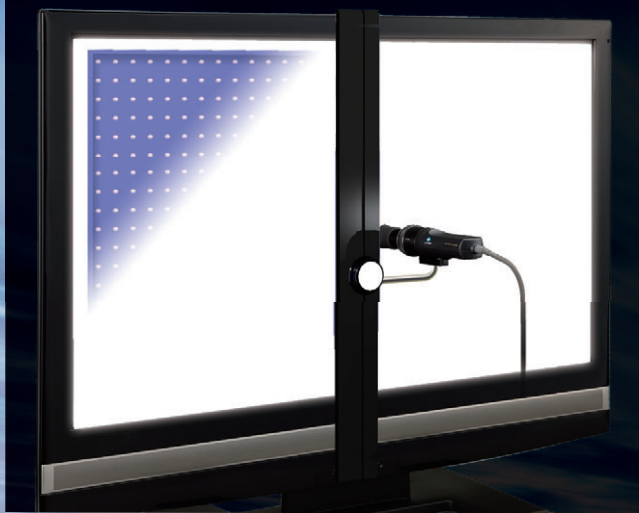

Smartphone



Uniformity

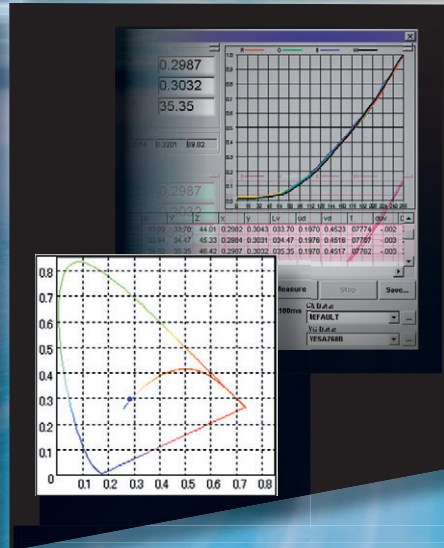


# Enables high-accuracy adjustment of EL/LED-backlit LCD TV gamma/white balance to greatly improve efficiency.

## White balance adjustment has advanced even further!

Our previous Display Color Analyzer CA-210 could adjust the white balance of LED-backlit LCD TVs to  $\Delta xy=0.010$ , but the new Display Color Analyzer CA-310 enables adjustment to  $\Delta xy=0.003$  so colors are even more true, as can be seen below.

### White balance adjustment of LED-backlit LCD TVs

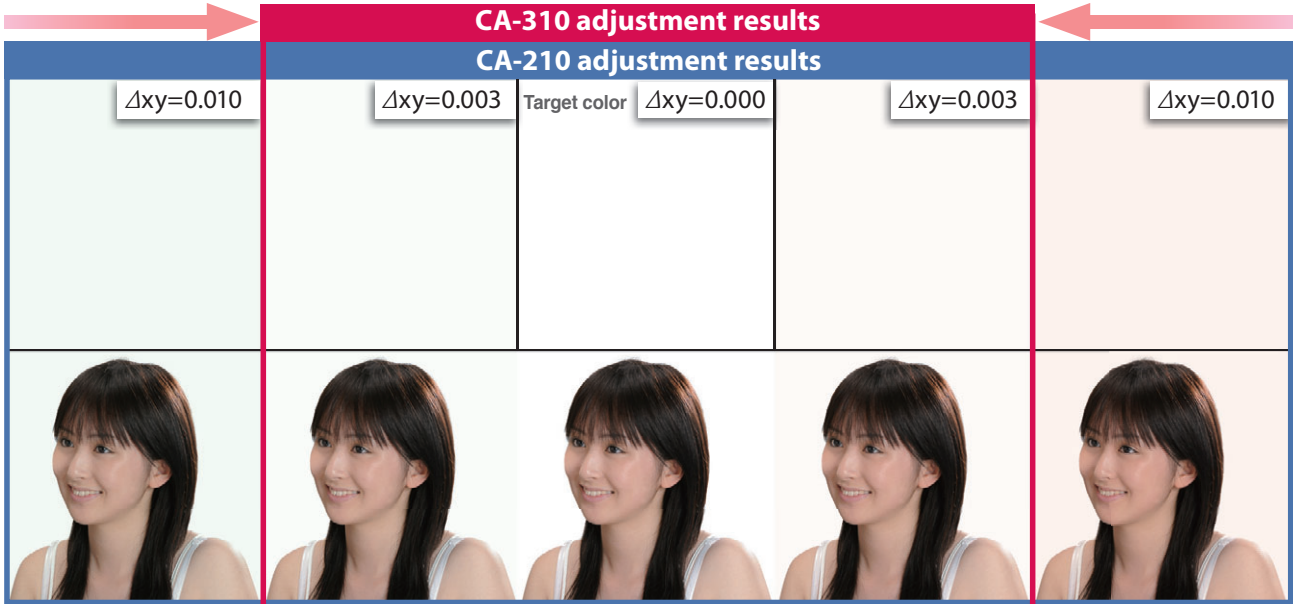

## Enables high-speed measurement of even extremely low luminances down to 0.005 cd/m<sup>2</sup>


Sensor noise reduction technology has been used to enable measurements even in the extremely low luminance region around 0.005 cd/m<sup>2</sup> at speeds as fast as 4 times per second. This allows the high-speed high-accuracy measurement essential for manufacturing high-grade displays. In addition, at luminances higher than 2.0 cd/m<sup>2</sup>, 20 measurements per second are possible.




## Reduces errors due to LED emission distribution variations to less than 1/3.

Variations in the emission distribution of LED backlights result in individual differences of about 10nm in peak intensity wavelength. If LED-backlit LCD TVs with such individual differences are adjusted using conventional color analyzers, color differences of close to 0.010 on the xy chromaticity diagram may occur. But the CA-310 has sensor sensitivities that more closely match the CIE 1931 color-matching functions, enabling the color difference in the same case to be reduced to around 0.003, suppressing errors to less than 1/3.

Variations in the emission distribution of LED backlights

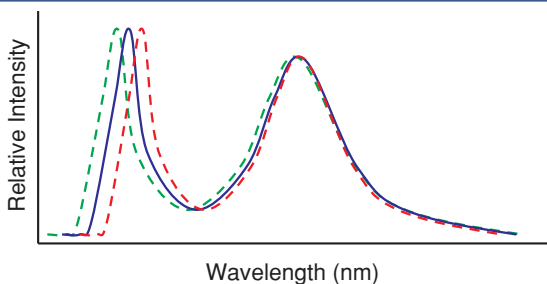

Measurement errors for LED backlights

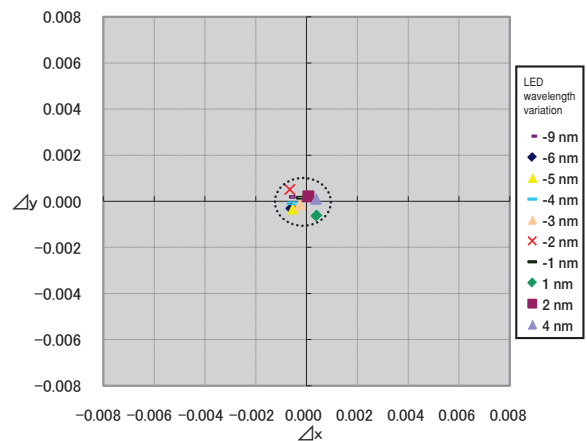


\*Errors (differences from true values) for white LEDs with different peak wavelengths when measured using CA-310. User calibration to standard LED performed.

# PC Software for Color Analyzer CA-SDK (Standard accessory)

Standard accessory SDK helps create software easily according to needs.

Sample software is bundled; you can start data collection easily.

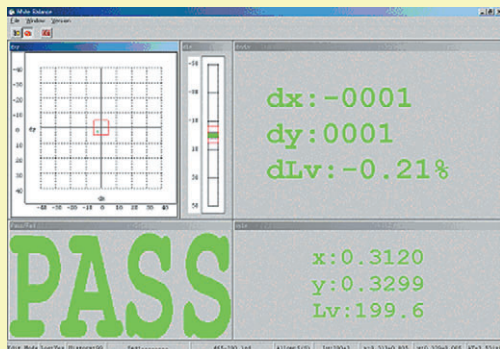


Example of White Balance Adjustment Software made by SDK


### Required system

OS : Windows® XP, Vista, 7

Windows® and Excel® are a trademark of Microsoft Corporation in the USA and other countries.

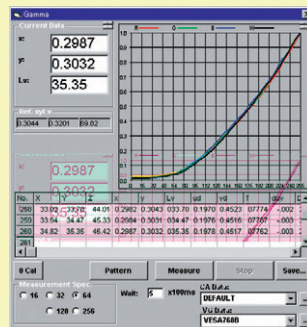

Sample software Gamma

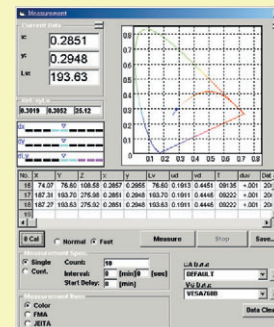

Sample software Color

## Sample software (Standard)


- Cal** CA-210 can be corrected in the matrix calibration method using Konica Minolta's spectroradiometer CS-1000A.
- Color** The measurement data of CA-210 can be acquired into the PC. Drift tests, LCD stability test and so on can be performed easily. The acquired data can be read with Excel® or other spreadsheet software.
- Contrast** Multi-point measurement (5, 9, or 25 points) can be made for white uniformity and contrast measurement.
- Gamma** R, G, B, and W gamma measurements for gradations of 16, 32, 64, 128, and 256 steps.

Expandable up to 5 measuring probes. (Requires expansion board CA-B15)



Number of digits for luminance display increased, enabling display to 0.0001 cd/m<sup>2</sup>.

## System Diagram

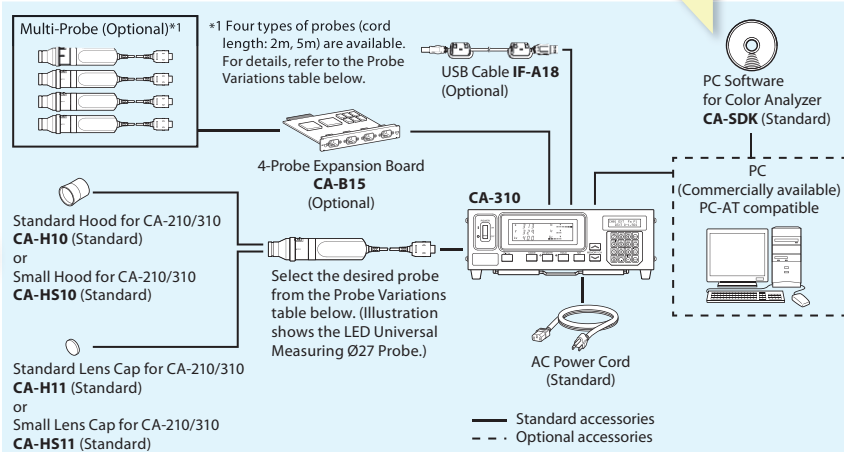

## Probe variations

This table is based on the most popular method for controlling emission intensity for each display type.

\* Measurements of displays using certain control methods are not possible. For details of measurement compatibility, contact your nearest Konica Minolta representative.

Examples for which measurement is not possible:

- Displays which use PWM, etc. for control of emission intensity.
- Displays with backlights which emit intermittently.
- Displays which write black for each frame, etc.

		CA-310 Probe				
		LED Universal Measuring Probe		LED Flicker Measuring Probe		
		Ø27 Probe CA-PU32 (2m) CA-PU35 (5m)	Ø10 Probe CA-PSU32 (2m) CA-PSU35 (5m)	Ø27 Probe CA-P32 (2m) CA-P35 (5m)	Ø10 Probe CA-PS32 (2m) CA-PS35 (5m)	
Applicability for different display types						
Transmissive / semi-transmissive LCD	Active Matrix Driven	○	○	○*	○*	
	Passive Matrix Driven	○	○	×	×	
OLED	Active Matrix Driven	○	○	○*	○*	
	Passive Matrix Driven	○	○	×	×	
PDP		○	△	×	×	
FED		○	○	×	×	
Rear Screen Projector	LCD	Active Matrix Driven	○	△	○*	△*
		Passive Matrix Driven	○	△	×	×
	DLP		○	△	×	×
	CRT	○	△	×	×	

- Recommended
- △ Measurement possible with restrictions, but probes marked with ○ are recommended
- × Measurement not possible

(LED Flicker Measuring Probes are unsuitable for measurements of CRTs.)




# Specifications

Model	CA-310(LED Universal Measuring Ø27 Probe)	CA-310(LED Universal Measuring Ø10 Probe)	CA-310(LED Flicker Measuring Ø27 Probe)	CA-310(LED Flicker Measuring Ø10 Probe)
Detector	Silicon photo cell			
Measurement area	Ø27 mm	Ø10 mm	Ø27 mm	Ø10 mm
Acceptance angle	±2.5°	±5°	±2.5°	±5°
Measurement distance	30±10 mm	30±5 mm	30±10 mm	30±5 mm
Display range	Luminance 0.0001 to 1000 cd/m <sup>2</sup>			
Luminance	Chromaticity Displayed in 4 or 3-digit value (Can be chosen)			
	Measurement range 0.0050 to 1000 cd/m <sup>2</sup>			
	Accuracy (for white)*1 0.0050 to 0.0999 cd/m <sup>2</sup> ±4%±0.0015 cd/m <sup>2</sup> 0.1000 to 9.999 cd/m <sup>2</sup> ±3%±0.0010 cd/m <sup>2</sup> 10.00 to 1000 cd/m <sup>2</sup> ±2%±0.0010 cd/m <sup>2</sup>			
Chromaticity	Repeatability(2σ)*1 0.0050 to 0.0999 cd/m <sup>2</sup> 1% + 0.0010 cd/m <sup>2</sup> 0.1000 to 0.9999 cd/m <sup>2</sup> 0.2% + 0.0010 cd/m <sup>2</sup> 1.000 to 1000 cd/m <sup>2</sup> 0.1%+0.0010 cd/m <sup>2</sup>			
	Measurement range 0.0500 to 1000 cd/m <sup>2</sup>			
	Accuracy *1 (temperature: 23±2°, relative humidity: (40±10)%) 0.0500 to 4.999 cd/m <sup>2</sup> ±0.005 for white 5.000 to 19.99 cd/m <sup>2</sup> ±0.004 for white 20.00 to 1000 cd/m <sup>2</sup> ±0.003 for white 120 cd/m <sup>2</sup> ±0.002 for white (±0.004 for monochrome)*2			
Flicker Contrast method	Repeatability(2σ)*1 0.0500 to 0.0999 cd/m <sup>2</sup> 0.010 0.1000 to 0.1999 cd/m <sup>2</sup> 0.004 0.2000 to 0.4999 cd/m <sup>2</sup> 0.002 0.5000 to 1000 cd/m <sup>2</sup> 0.001			
	Measurement range -			
	Display range -			
Flicker JEITA method *3	Accuracy -			
	Repeatability(2σ) -			
	Measurement range -			
Measurement speed*4	Accuracy -			
	Repeatability(2σ) -			
	Measurement range -			
Display	Accuracy -			
	Repeatability(2σ) -			
	Measurement range -			
SYNC mode	NTSC, PAL, EXT, UNIV, INT			
Object under measurement	Vertical synchronization frequency: 40 to 200 Hz		Vertical synchronization frequency: 40 to 200 Hz (Luminance or chromaticity measurement), 40 to 130 Hz (Flicker measurement)	
Memory channel	100 channels			
Analyzer function	Standard function			
Interface	USB; RS-232C (38,400 bps or below)			
Multi-point Measurement	Max. 5 points (Use 4-Probe Expansion Board CA-B15)			
Operation temperature/humidity range	Temperature: 10 to 28°C; relative humidity 70% or less with no condensation Luminance change: ±2% of reading for white Chromaticity change ±0.002 for white, ±0.006 for monochrome from reading of Konica Minolta's standard LCD *1, 120 cd/m <sup>2</sup> , with 23°C 40%			
Storage temperature/humidity range	0 to 28°C; relative humidity 70% or less with no condensation 28 to 40°C: relative humidity 40% or less with no condensation			
Input voltage range	100-240V~, 50-60 Hz, 50 VA			
Size/weight	Main body 340(W)×127(H)×216(D) mm/3.58 kg			
Probe	Ø49×208 mm / 530 g	Ø49×236 mm / 550 g	Ø49×208 mm / 530 g	Ø49×236 mm / 550 g

\*1 The chromaticity and luminance are measured under Konica Minolta's condition (standard LCD(6500K, 9300K) is used). \*2 The luminance for monochrome is measured when the reading of luminance for white is 120 cd/m<sup>2</sup>. \*3 Measurement of flicker (JEITA method) is supported by SDK software. \*4 Measuring probe connected to probe connector P1 only, used USB(used RS-232C Baud rate: 38400 bps) \*5 Measured by Konica Minolta's PC (P3-600 MHz)

## Dimensions (Units : mm)

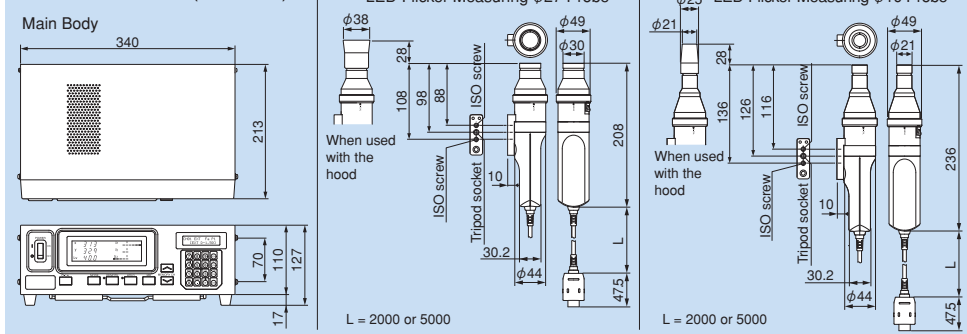

- Select the desired type of LED Universal Measuring type probe or LED Flicker Measuring type probe.
- Contains mercury in the backlighting of LCD used for display. Dispose of according to local, state or federal laws.
- KONICA MINOLTA, the Konica Minolta logo and symbol mark, and "Giving Shape to ideas" are registered trademarks or trademarks of KONICA MINOLTA, INC.
- Screens shown are for illustration purpose only.
- The specifications and appearance shown herein are subject to change without notice.
- Some lamp control methods may make accurate measurements difficult. For details, please contact your nearest Konica Minolta sales office or dealer.



## SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.



Certificate No : LRO 0960094/A  
Registration Date : March 3, 1995



Certificate No : JQA-E-80027  
Registration Date : March 12, 1997

**KONICA MINOLTA, INC.**  
Konica Minolta Sensing Americas, Inc.  
Konica Minolta Sensing Europe B.V.

Osaka, Japan  
New Jersey, U.S.A.  
European Headquarter /BENELUX  
German Office  
French Office  
UK Office  
Italian Office  
Swiss Office  
Nordic Office  
Polish Office  
SE Sales Division  
Beijing Office  
Guangzhou Office  
Chongqing Office  
Qingdao Office  
Wuhan Office

**Phone** : 888-473-2656 (in USA), 201-236-4300 (outside USA)  
Nieuwegein, Netherlands  
München, Germany  
Roissy CDG, France  
Warrington, United Kingdom  
Cinisello Balsamo, Italy  
Dietikon, Switzerland  
Västra Frölunda, Sweden  
Wroclaw, Poland  
Shanghai, China  
Beijing, China  
Guangdong, China  
Chongqing, China  
Shandong, China  
Hubei, China  
Singapore  
Goyang-si, Korea

**Fax** : 201-785-2482  
+31 (0) 30 248-1193  
+49 (0) 89 4357 156 0  
+33 (0) 1 80 11 10 70  
+44 (0) 1925 467300  
+39 02849488.00  
+41 (0) 43 322-9800  
+46 (0) 31 7099464  
+48 (0) 71 73452-11  
+86 (0)21-5489 0202  
+86 (0)10-8522 1551  
+86 (0)20-3826 4220  
+86 (0)23-6773 4988  
+86 (0)532-8079 1871  
+86 (0)27-8544 9942  
+65 6563-5533  
+82 (0)2-523-9726

Konica Minolta (CHINA) Investment Ltd.  
SE Sales Division  
Beijing Office  
Guangzhou Office  
Chongqing Office  
Qingdao Office  
Wuhan Office

Konica Minolta Sensing Singapore Pte Ltd.  
Konica Minolta Sensing Korea Co., Ltd.

Addresses and telephone/fax numbers are subject to change without notice. For the latest contact information, please refer to the KONICA MINOLTA Worldwide Offices web page :

<http://konicaminolta.com/instruments/network>