


Pomona®

Model 5899 Multi-Use DMM Test Lead Kit

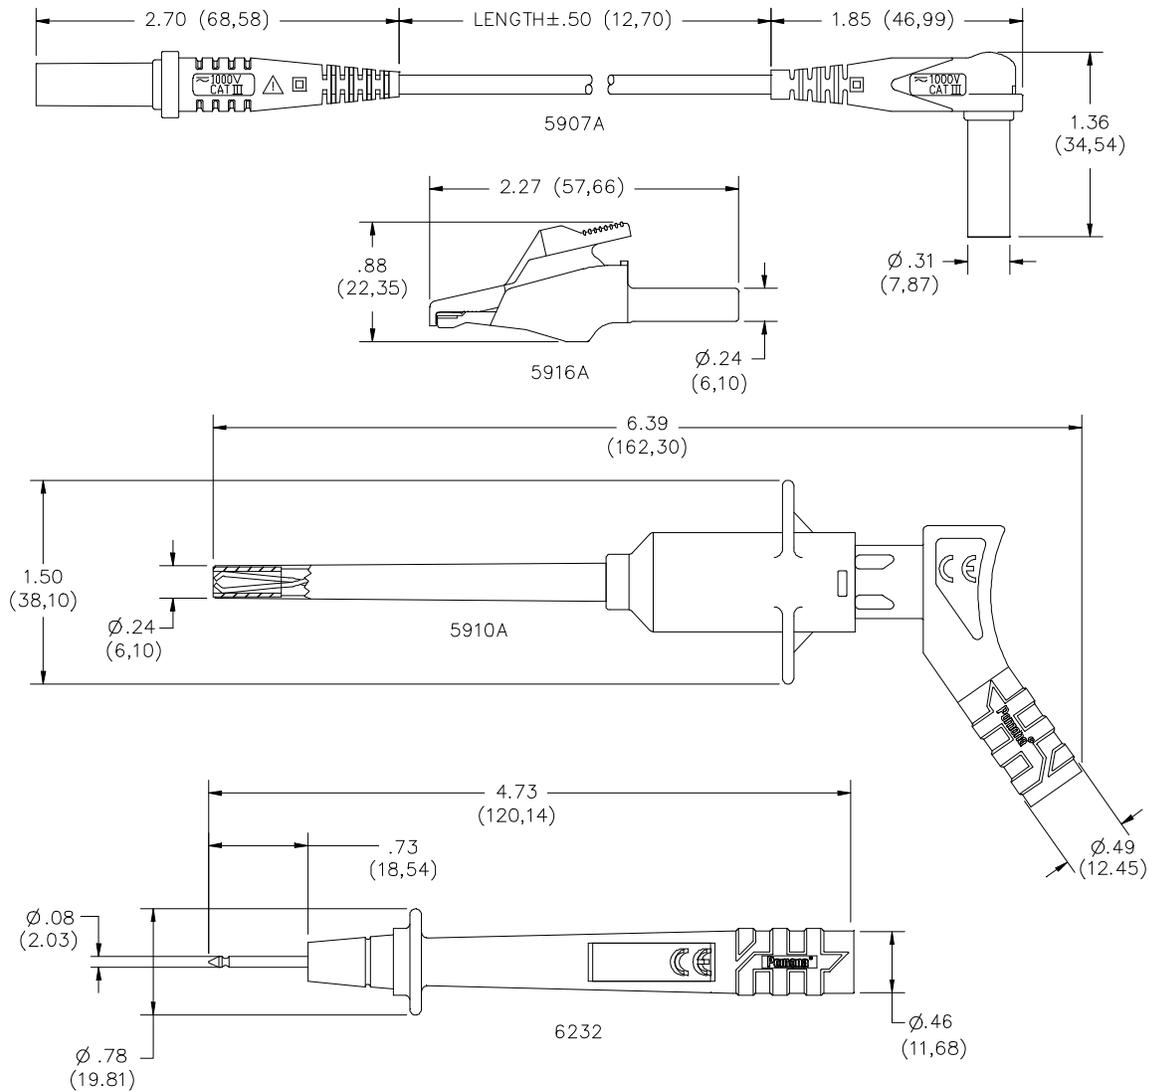

FEATURES:

- Complies with IEC1010-2-031 standard for hand held test accessories.
- Test Leads with a right angle banana plug is ideal for hand held digital multimeters.
- Compatible with most Fluke, Amprobe, H.P., Tektronix and Wavetek Digital Multimeters.
- Test Accessories conveniently store in the tri-fold nylon pouch provided.
- Probes, Alligators and Grabbers fit directly on to the test leads for test versatility.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

MATERIALS:

Model **5907A**: Test Lead Straight to Right Angle: Banana Spring: Nickel plated beryllium copper, Insulation–polypropylene, Wire: 48" silicone 18" AWG, Color: One Black, One Red, **RATINGS**: 1000 VRMS, 10 Amperes

Model **5916A**: Medium Alligator Clip: Body–Steel, Nickel plated, Insulation–Polypropylene, Color: One Black, One Red, **RATINGS**: 300 VRMS, 5 Amperes

Model **5910A**: Maxigrabber set with Pincer Tip - **RATINGS**: 1000 VRMS, 10 Amperes, CAT III, P2

Model **6232**: Test Probe: Insulation – Nylon 6, Probe tip – Brass, nickel plated, 4mm safety jack: brass, nickel plated, Color: One Black, One Red, **RATINGS**: 1000V electrical, 600V electronic, Max., 10 Amperes

ORDERING INFORMATION: 5899 (Includes a kit of items from above)

Replacement P/N's: Model **5907A**: Test Lead Straight to Right Angel, Model **5916A**: Medium Alligator Clip, Model **5910A**: Maxigrabber set with Pincer Tip, Model **6232**: Test Probe.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Made in USA