

IDXPERT™ Electrical I.D. Labels




▶ Visit us at Transcat.com!
35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

▶ WIRE AND CABLE MARKERS — ADHESIVE WRAP AROUND


Durable vinyl cloth wrap-around wire & cable marker. Stays in place, but can be removed cleanly and reapplied if necessary. Printer automatically "multiple repeats" your text to create a wrap-around marker with 360° visibility of legend.

▶ B-498 Vinyl Cloth material. Temp Range: -40°F to 175°F (-40°C to 70°C).

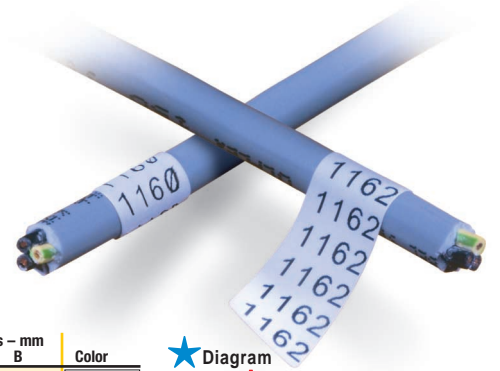

Wire Gauge*	Max. Wire Diameter	Diagram	Part Number	Labels per Cartridge	Dimensions – inches		Dimensions – mm		Color
					A	B	A	B	
22-16 Gauge	0.110" max dia (2.80 mm)	★	X-7-498	350	0.500	0.500	12.70	12.70	BK on WT
16-10 Gauge	0.160" max dia (4.00 mm)	★	X-11-498	350	0.500	0.750	12.70	19.05	BK on WT
12-10 Gauge	0.210" max dia (5.00 mm)	★	X-19-498	250	1.000	1.000	25.40	25.40	BK on WT
12-10 Gauge	0.210" max dia (5.00 mm)	★	X-18-498	250	0.750	1.000	19.05	25.40	BK on WT
10-4 Gauge	0.270" max dia (7.00 mm)	★	X-103-498	250	1.000	1.250	25.40	31.75	BK on WT


*Approx based on AWG for THHN wire



▶ WIRE AND CABLE MARKERS — SELF LAMINATING

This wire and cable marker's protected printing offers superior chemical and abrasion resistance. Marker features a non-printed clear area which wraps around and overlaminates the printed text. Printer automatically "multiple repeats" your text in the white print area.

▶ B-427 Vinyl Self-Laminating material, resistant to water, oil, solvents and abrasion. Temp range: -94°F to 158°F (-70°C to 70°C). UL recognized.

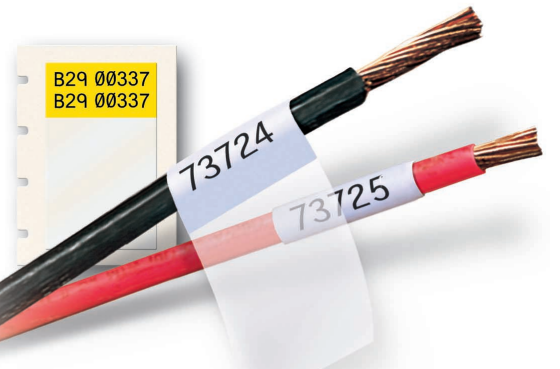

Wire Gauge*	Max. Wire Diameter	Diagram	Part Number	Labels per Cartridge	Dimensions – inches			Dimensions – mm			Color
					A	B	C	A	B	C	
16-10 Gauge	0.160" max dia (4.00 mm)	▶	XSL-11-427	500	0.500	0.750	0.375	12.70	19.05	9.53	BK on WT
16-10 Gauge	0.160" max dia (4.00 mm)	▶	XSL-96-427	250	1.000	0.750	0.375	25.40	19.05	9.53	BK on WT
12-10 Gauge	0.210" max dia (5.00 mm)	▶	XSL-17-427	500	0.500	1.000	0.375	12.70	25.40	9.53	BK on WT
12-10 Gauge	0.210" max dia (5.00 mm)	▶	XSL-18-427	250	0.750	1.000	0.375	19.05	25.40	9.53	BK on WT
12-10 Gauge	0.210" max dia (5.00 mm)	▶	XSL-19-427	250	1.000	1.000	0.375	25.40	25.40	9.53	BK on WT
10-4 Gauge	0.270" max dia (7.00 mm)	▶	XSL-102-427	250	0.500	1.250	0.375	12.70	31.75	9.53	BK on WT
10-4 Gauge	0.270" max dia (7.00 mm)	▶	XSL-103-427	250	1.000	1.250	0.500	25.40	31.75	12.70	BK on WT
10-4 Gauge	0.270" max dia (7.00 mm)	▶	XSL-115-427	250	1.500	1.250	0.500	38.10	31.75	12.70	BK on WT
10-4 Gauge	0.320" max dia (8.00 mm)	▶	XSL-29-427	500	0.500	1.500	0.500	12.70	38.10	12.70	BK on WT
10-4 Gauge	0.320" max dia (8.00 mm)	▶	XSL-30-427	250	0.750	1.500	0.500	19.05	38.10	12.70	BK on WT
10-4 Gauge	0.320" max dia (8.00 mm)	▶	XSL-31-427	250	1.000	1.500	0.500	25.40	38.10	12.70	BK on WT
10-4 Gauge	0.320" max dia (8.00 mm)	▶	XSL-31-427-YL-BK	250	1.000	1.500	0.500	25.40	38.10	12.70	BK on YL
10-4 Gauge	0.320" max dia (8.00 mm)	▶	XSL-32-427	250	1.500	1.500	0.500	38.10	38.10	12.70	BK on WT
3 Gauge-2/0	0.530" max dia (14.00 mm)	▶	XSL-21-427	100	1.000	2.500	0.750	25.40	63.50	19.05	BK on WT
3 Gauge-2/0	0.530" max dia (14.00 mm)	▶	XSL-21-427-YL-BK	100	1.000	2.500	0.750	25.40	63.50	19.05	BK on YL
3 Gauge-2/0	0.530" max dia (14.00 mm)	▶	XSL-116-427	100	1.500	2.500	0.750	38.10	63.50	19.05	BK on WT
3/0-400 kcmil	0.850" max dia (22.00 mm)	▶	XSL-23-427	100	1.000	4.000	1.000	25.40	101.60	25.40	BK on WT
3/0-400 kcmil	0.850" max dia (22.00mm)	▶	XSL-23-427-YL-BK	100	1.000	4.000	1.000	25.40	101.60	25.40	BK on YL
3/0-400 kcmil	0.850" max dia (22.00 mm)	▶	XSL-33-427	100	1.500	4.000	1.000	38.10	101.60	25.40	BK on WT
500-900 kcmil	1.300" max dia (33.00 mm)	▶	XSL-34-427	50	1.500	6.000	1.500	38.10	152.40	38.10	BK on WT

*Approx based on AWG for THHN wire

