

TUFF BUCKET NITRO: TRANSPORTING NITROGEN SAFELY


Designed to transport nitrogen cylinders up-tower to charge hydraulic system accumulators. This bucket works very well for transporting tall heavy objects such as hydraulic rams and pitch cylinders. This bag features a convenient carry handle located at the mid-point of the bucket. The capacity of this bucket is 4710 cubic inches.

TUFF CONSTRUCTION

- Triple Stitched
- 30 oz. Canvas
- 3.5 - 4.0 oz. Leather
- Reinforced Bottom
- 3/8" Steel Rim
- (2) Webbing Handles for Ground Transport
- Black 1" Webbing Closure (3500 lb.)
- Black 1" Rigging Handle (9000 lb.)
- 1 1/4" D-Ring Rigging Eye
- Made in USA

SPECIFICATIONS

- Item Number - TB-1060
- Upright Load Rating - 200 lbs
- Closure Load Rating - 200 lbs
- Diameter - 10"
- Height - 60"
- Capacity - 4,710³ in (2.72³ ft)

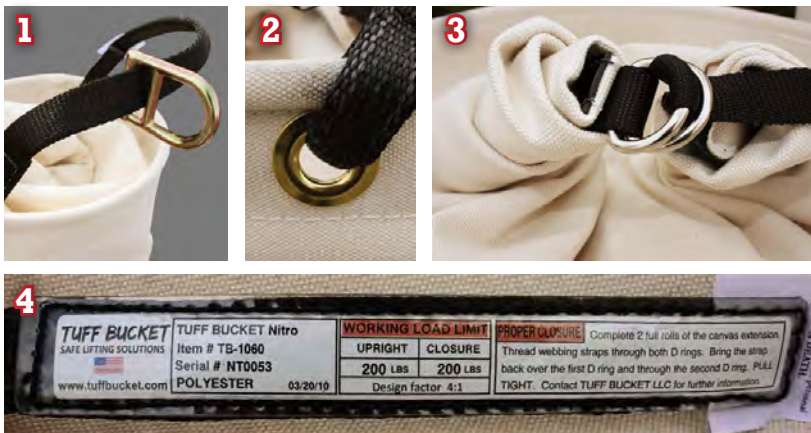

SETTING THE
STANDARD
FOR SAFE
LIFTING



TUFF BUCKET
SAFE LIFTING SOLUTIONS