




# V2G™

## SPECIAL FEATURES:

- 9.75 base curved lens provides full side protection.
- Lenses are treated to prevent fogging and self seal small scratches.
- Lens and Frame are vented to increase airflow.
- Headband features ratchet adjustment for perfect fit.
- Foam padding forms a perfect seal to keep out dust and airborne particles.
- Headband features quick fit retainer.
- Lenses provide 99% protection against harmful UV rays.
- Interchangeable temples/headband included with each pair of V2G™

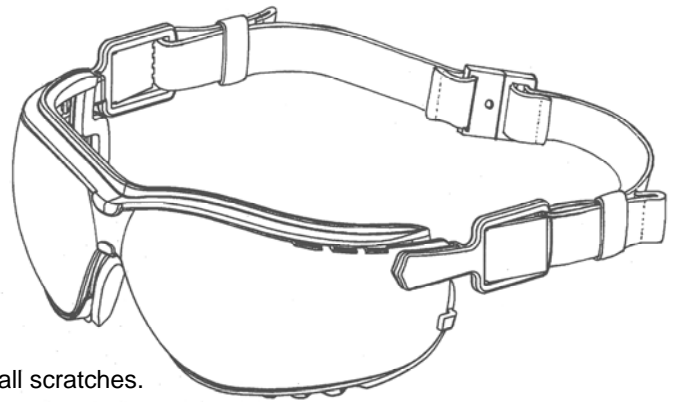

# TRANSCAT®

35 Vantage Point Drive  
Rochester, NY 14624  
1.800.800.5001

[▶ Visit us at Transcat.com!](http://Transcat.com)

## GENERAL SPECIFICATIONS:

Lens thickness:	2.1mm	PD:	68mm
Lens Base:	9.5 curve	Weight:	38gm
Lens size vertical:	54mm	Lens size diagonal:	81.1mm
Bridge:	15mm	Overall length (lens-tip):	81mm
Overall Width:	143mm	Closest point between lens:	9.5mm
Strap Length:	443mm	Closest point between temple tips:	146mm

## FRAME AND LENS OPTIONS:

- Black Frame
  - o Clear Anti-fog, Gray Anti-fog, and Amber Anti-fog, I/O Mirror Anti-fog

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	Single Lens – Anti-fog coated
Body	PVC	Flexible fitting body with 2 indirect vents
Ventilation Parts	Nylon	Clip on frame
Nose piece	PVC	Universal, integral to frame
Headband	Textile Elastic	Adjustable elastic fixed on Ventilation parts
Foam Padding	Chloroprene Rubber Neoprene	Foam padding attached to inside of frame Flame resistance closed cell foam

## MARKINGS:

Lens: As per Specification

Frame: As per Specification

## PACKAGING:

1 pc in a PP bag; 12 pcs per inner box; 144 pcs in an outer carton

## STANDARDS:

ANSI, CE, and CSA



[▶ Visit us at Transcat.com!](http://Transcat.com)

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001