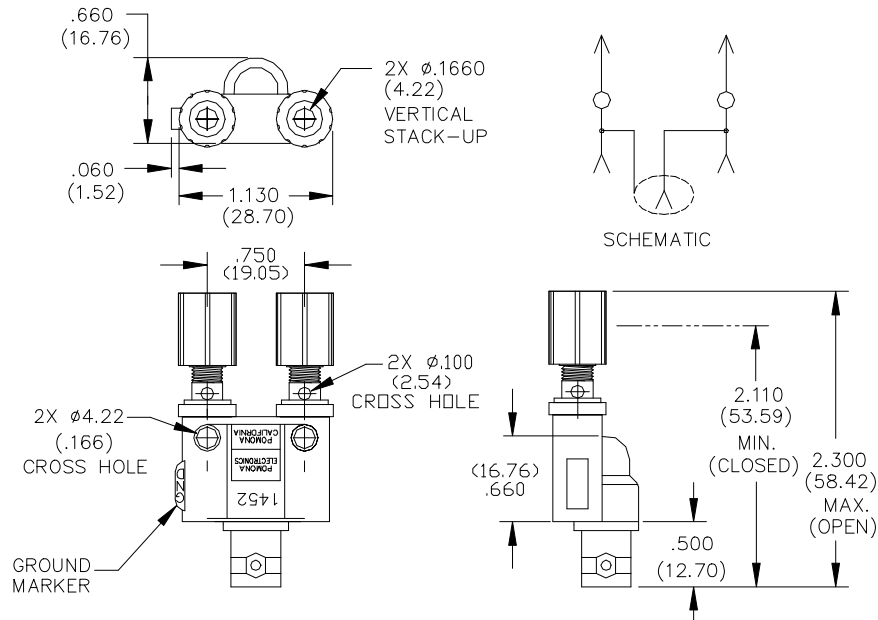


Pomona[®]**Model 1452
Adapter-Binding Posts To BNC
Receptacle****FEATURES:**

- Permits single or double banana plugs to be used with equipment having a BNC male.
- Cross holes 4.2 (.166) dia. in body provide side stack up connections.

MATERIALS:

Upper Conn: Binding Posts, Insulated.

Material: Binding post body, brass H.H. per QQ-B-626, Alloy 360.

Finish: Nickel plated per QQ-N-290, class 2 (.0002 min.).

Insulation: Acrylonitrile-Butadiene-Styrene, molded to binding posts and BNC receptacle.

Color: One Red and one Black (Gnd).

Operating Temp.: $+115^{\circ}\text{C}$. ($+239^{\circ}\text{F}$.) Max.

Marking: "POMONA ELECTRONICS POMONA CALIFORNIA 1452."

Lower Conn: BNC receptacle, comparable to UG 1094/U.

Finish: Body and fittings, tarnish resistant.

Nominal Impedance: 50 Ohms.

RATINGS

Operating Temperature: $+50^{\circ}\text{C}$. ($+122^{\circ}\text{F}$.) Max.

Operating Voltage : Hand-held testing: 30 VAC/60 VDC Max.

Hands free testing in controlled voltage environments: 500 VRMS.

ORDERING INFORMATION: Model 1452.

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (.51 mm), $.xxx = \pm .005$ " (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA