


Pomona®

**Model 5519A  
IEC 1010 Compliant Replacement Test  
Leads For Sheathed Style DMM's**

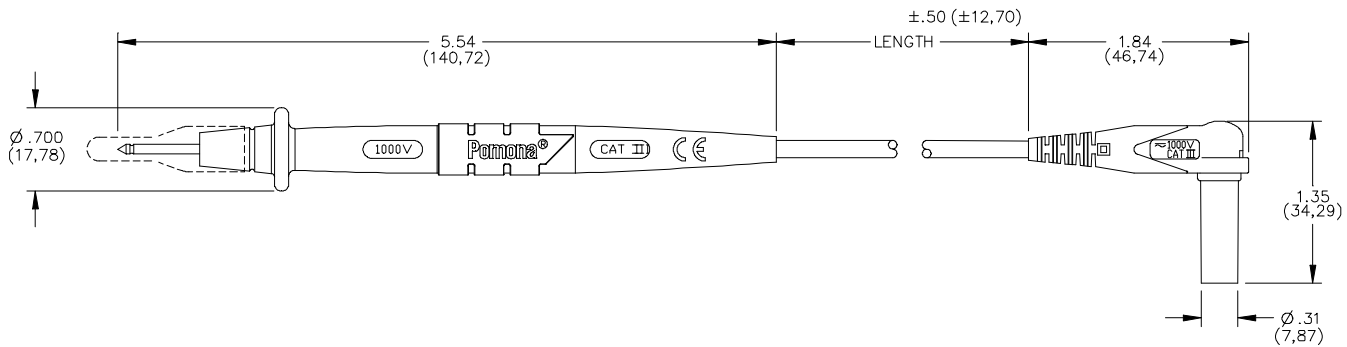

**FEATURES:**

- Designed for Fluke, H-P, Tektronix and Wavetek DMM's with a safety style of sheathed banana jack.
- Probe body incorporates a two step mold process. First step is Polypropylene for probe rigidity. Second step is Santoprene® rubber for handling comfort, added insulation protection and wire strain relief.
- Probe test leads are designed with over-voltage spike protection of up to 6kV.
- Probe body inner insulation is fire retardant Polypropylene for added safety.
- Probe body and banana plug are molded directly to the wire for robust pull strength.
- Wire is a high strand count silicone wire for extreme flexibility and high temperature resistance.
- Banana plug spring is nickel plated Beryllium Copper for long insertion life.
- UL Rated test accessory

**MATERIALS:**

Probe Body: Outer Insulation - Santoprene® Rubber, Color: Gray

Inner Insulation – Polypropylene, Fire Retardant, Color: One Black, One Red

Tip: Nickel plated brass

Wire: 18 AWG, 65 x 36 Tinned Copper Strand, Silicone Insulation, Length: 48" (122cm), O.D. .144" (3,66mm)

Banana Plug: Body – Brass, Nickel Plated

Spring – Beryllium Copper, Nickel Plated

Insulation – PVC, Color: One Black, One Red

**RATINGS:**

IEC 1010-2-031, Category III, P2 Compliant

Operating Voltage: 1000 VRMS/DC

Current: 10 Amperes

UL Rated

**ORDERING INFORMATION: Model 5519A**

Includes a set of one black and one red test lead

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA