

## FLIR E-Series bx Thermal Imaging Cameras

**TRANSCAT**

Thermal Imaging Hotline

Call **800-854-4960**

▶ Visit us at [Transcat.com!](http://Transcat.com!)



## E-Series bx

A Brand New Line

Now the Leader in its Class

Groundbreaking Performance & Affordability

Superior Point & Shoot Thermal Imagery

Built-in Digital Camera & Laser Pointer

Mobile Device Wi-Fi Connectivity

Large Bright Touchscreen



Large 3.5" Touchscreen Puts Fast Tools at Your Fingertips



- 3 MP Digital Camera
- LED Lamp
- Laser Pointer

Visible Light Pictures Align with Thermal Images



## The E-Series bx



Connect to iPhone or iPad via Wi-Fi to  
Use the FLIRViewer App for Processing  
and Sharing Results



Large Backlit Buttons Fit  
Bare Hands or Gloves

## E-Series bx Features


Presenting the best performance and value in compact thermal imaging cameras ever, designed to fit beautifully into your IR inspection program, budget, and the palm of your hand.



Spot LED Light for Dark Corners



Add Up to 3 Moveable Measurement Spots Easily

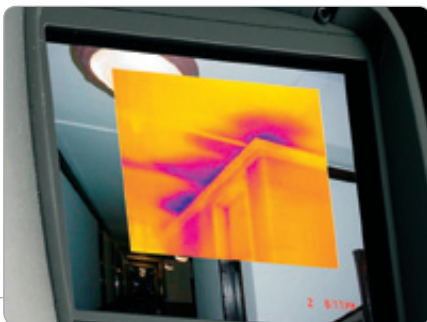

Picture-in Picture Display

**Superior Thermal Imaging** – Up to 76,800 pixels (320 × 240) for better long-range accuracy and the highest level of point & shoot camera IR resolution

**Improved Digital Camera** – 3 megapixel resolution provides clearest visible light pictures in its class and includes bright LED lamp that doubles as a flashlight

**New! Large Landscape Touchscreen** – Brighter than other brands, the E-Series bx touchscreen provides an intuitive interface that takes full advantage of the entire 3.5" display with no image cropping

**New! Wi-Fi Connectivity** – Send images and data to an iPhone® or iPad® to share reports and critical information quickly using FLIR View App

**Laser Pointer** – Pinpoints a reference spot with a laser and aligns a marker to it on the image for precise detection

**Accurate Temperature Measurements** – Accuracy calibrated within 2% or +/- 2°C to meet the standard you can always trust FLIR to deliver

**Scalable P-i-P and Thermal Fusion** – Overlay thermal and visible images for easy location identification and clearer documentation

**Multiple Measurements** – Add up to 3 box areas and 3 moveable spots using the touchscreen to gather more detailed temperature information

**MeterLink** – Wirelessly transmit vital diagnostic data from clamp and moisture meters directly to the camera for annotating thermal images to further support findings and decisions

**Annotation** – Add voice comments via Bluetooth headset and text notes from the touchscreen keypad

**InstantReport** – Generate a professional PDF document directly from the camera right on site

**Plenty of Extras** – Small, light, and rugged with large, backlit, easy-to-operate buttons, 6 palette choices, and more

## A New Choice in Compact Thermal Imaging

- **E30 bx** – 19,200 pixels  
*Economical and efficient*
- **E40 bx** – 19,200 pixels  
*Wi-Fi to mobile devices & higher sensitivity*
- **E50 bx** – 43,200 pixels  
*Superior accuracy and sensitivity*
- **E60 bx** – 76,800 pixels  
*Best point & shoot thermal resolution*

### E30 bx

#### Includes:

- High quality thermal imaging at 19,200 pixels (160 x 120)
- Thermal sensitivity of 0.075°C
- 3.5" touch-screen LCD
- Manual focus
- 60 Hz image frequency
- Auto/manual level span adjustments
- Temperature calibration standard at 250°C
- Isotherm and automatic hot/cold detection marker
- Radiometric and non-radiometric IR video streaming
- Laser pointer
- Composite video and USB-mini outputs
- FLIR Tools software for camera updates

### E40 bx

#### Additional Features:

- 3 megapixel digital visible light camera with lamp
- Wi-Fi connectivity to iPad/iPhone FLIRViewer application
- Thermal sensitivity of 0.045°C
- Picture-in-Picture to superimpose thermal images
- Temperature calibration standard at 650°C
- DeltaT temperature difference function
- 2x digital zoom
- 3 moveable spots and 3 box areas
- Voice & text annotation
- Fixed Picture-in-Picture to overlay thermal & digital images
- MeterLink via Bluetooth to clamp and moisture meters

### E50 bx

#### Additional Features:

- Higher quality IR at 43,200 pixel (240 x 180) resolution
- 4x digital zoom
- Thermal fusion to blend IR with visible light images
- Scalable Picture-in-Picture

### E60 bx

#### Additional Features:

- Best point & shoot resolution at 76,800 pixels (320 x 240)
- InstantReport



## Wi-Fi Connectivity to Mobile Devices

Download the new FLIRViewer App from the Apple Store to your iPad or iPhone and link to E-Series cameras via Wi-Fi. Transfer images to your mobile device, then use it to add further measurement spots, readjust span and level, change palettes, create reports, and email findings to decision makers easily. It's an efficient way to make a big impact.



## MeterLink™


Be sure you're getting critical moisture readings so you make the right call. Quantify the severity of moisture related problems with MeterLink-enabled moisture meters that use Bluetooth wireless communication to send data to the FLIR camera for annotation on stored thermal images. Contact FLIR to learn about other tools that connect with MeterLink.



## InstantReport

Create professional reports on board your camera with InstantReport. FLIR's analysis software has always offered professional results and been easy to use. Now create reports without a PC! InstantReport includes thermal and visual images along with your measurement tools and text & sketch annotations in a standard PDF document that's easy to share right from the touchscreen.

Thermogram 2010-07-21 10:47 AM



building 18 - electrical



### Measurements

Spot 1	77.3°C
Area 1 Max	217.7°C
Ar1max-Sp1	140.4°C

DC	68.5A
DC	68.5A

### Parameters

Emissivity	0.98
Ref temp	20.0°C
Obj dist	1.0m
FOV	25°



## Imaging Specifications

Model Number	E30 bx	E40 bx	E50 bx	E60 bx
Imaging				
Resolution	160 x 120	160 x 120	240 x 180	320 x 240
Total Pixels	19,200	19,200	43,200	76,800
Thermal Sensitivity	<0.075°C	<0.045°C		
Accuracy	+/-2% or 2°C			
Temperature Range	-4°F to 248°F (-20°C to 120°C)			
Lens Options	Standard: 25° x 19°			
Zoom		2x Continuous Digital	4x Continuous Digital	4x Continuous Digital
Focus	Manual			
Uncooled Microbolometer	x	x	x	x
Color LCD Touch Screen	3.5" (320 x 240 )			
3 MP Video Camera w/Lamp		x	x	x
Picture-in-Picture		Fixed	Scalable	Scalable
Fusion			x	x
Laser Spot	x	x	x	x
Video Out	Composite			
Frame Rate	60 Hz			
Analysis				
Moveable Spots	1	3	3	3
Box Areas	1	3	3	3
Delta T		x	x	x
Annotation				
Voice		x	x	x
Text		x	x	x
File Storage				
Radiometric JPG to SD Card	x	x	x	x
MPEG4 Video Recording		x	x	x
Other				
Wi-Fi to iPhone/iPad		x	x	x
MPEG4 Streaming Video Wi-Fi	x	x	x	x
Bluetooth to PC/Smartphone		x	x	x
MeterLink		x	x	x
InstantReport				x
FLIR Tools	x	x	x	x
Battery Type/Op Time	Li-Ion/4 hours			
Weight	TBD			
Warranty	2 Years (warranty extended to 2 years when camera is registered)			

‡ Professional analytics tools include DeltaT functionality and multiple movable spots



10-Year Detector Protection  
5-Year Battery  
2-Year Parts & Labor



## Infrared Training Center

Get the most out of your FLIR investment and advance your career with world-class instruction through the Infrared Training Center. An ITC certificate is written proof of your expertise in operating your camera and interpreting the thermal information it provides.



# TRANSCAT®

Thermal Imaging Hotline

Call **800-854-4960**

▶ Visit us at [Transcat.com!](http://Transcat.com!)