

## Models 72923

## SMD Test Probe W/ Sharp, Spring Mounted Tip, 2MM



### Features

- SMD test probe with sharp, spring mounted tip and 2mm jack
- Provides ultra-fine control for probing high density SMD circuits
- Very fine 0.03in (0.7mm) diameter stainless steel tip is spring-mounted for controlled pressure
- Removable, clear IC insulator cap prevents shorting of adjacent IC logos.
- Sheathed 2mm receptacle adapts to 2mm test leads and adapters.


### Materials

- Probe Body: Brass
- Probe Tip: Steel
- Insulation: Polypropylene
- Cap Insulation: Polypropylene

### Ordering Information

Model:72923-Color

Available colors: Black (-0), or Red (-2)

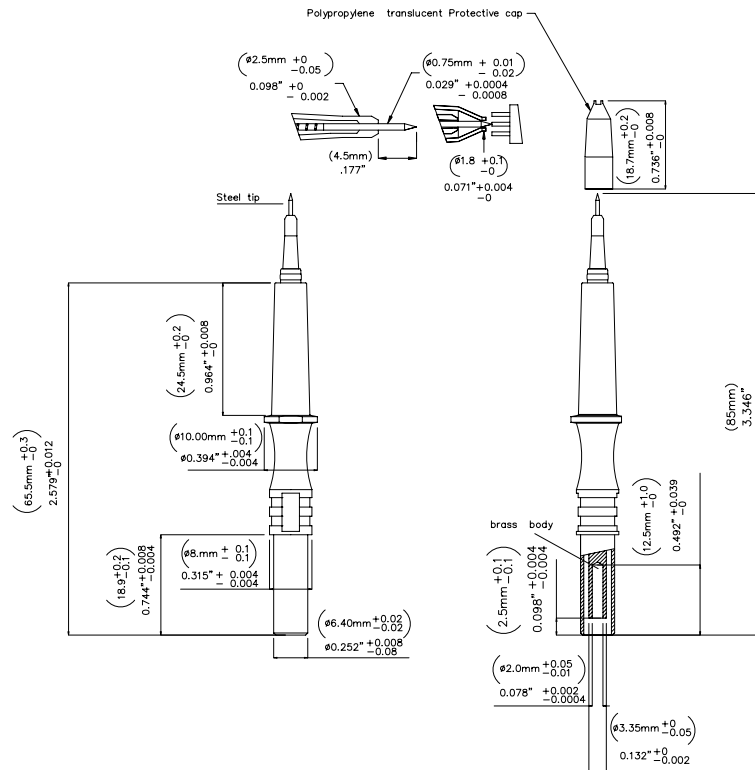

### Specifications

Max Current	Max. 1A
Max Voltage	600 V Cat III
Temperature	-20° C + 80° C
Max Resistance	Less than 5 mΩ

TRANSCAT  
35 Vantage Point Drive  
Rochester, NY 14624  
800-828-1470  
www.transcat.com

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm 0.02$ " (.51 mm), .xxx =  $\pm 0.005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.