

Multi-purpose Clamp-On Meters

**Rugged • Accurate
Dependable • Safe
Affordable • Easy to Use**

Rugged and professional, our complete line of Clamp-on meters are designed and manufactured to the highest safety standards offering the most comprehensive set of measurement parameters available including:

AC and DC Voltage, AC and DC Current, Resistance, Continuity, Frequency, Diode Testing, InRush Current, Power Measurement (Real, Reactive and Apparent), THD, Crest Factor, Min/Max and Peak Capture, Phase Rotation, Temperature and more.

Data logging and wireless communication to a PC or Android™ application are available on several models.

AEMC® provides a solution to all your electrical measurement needs.



Our products are backed by over 125 years of experience in test and measurement equipment, and encompass the latest international standards for quality and safety.

 **Technical Hotline: (800) 343-1391**
 **www.aemc.com**

 **AEMC®**
INSTRUMENTS
CHAUVIN ARNOUX GROUP

AC CURRENT METERS WITH FLEXIBLE SENSOR

Digital FlexProbe®

Models 400D & 4000D

Provide a welcomed solution when accessing electrical conductors in tight places



MiniFlex:
Model 400D-6 (6" probe)
Model 400D-10 (10" probe)



MiniFlex:
Model 4000D-14 (14" probe)
Model 4000D-24 (24" probe)



AmpFlex:
Model 400D-60 (60" probe)
Model 400D-120 (120" probe)



► SPECIFICATIONS

MODEL	400D		
ELECTRICAL			
Display Range	4A _{AC}	40A _{AC}	400A _{AC}
Measurement Range	0.020 to 3.999A	4.00 to 39.99A	40.0 to 399.9A
Resolution	1mA	10mA	100mA
Accuracy	±(2% + 10cts)	±(1.5% + 2cts)	±(1.5% + 2cts)
Sensor Diameter	400D-6: Ø 1.77" (45mm) / 400D-10: Ø 2.75" (70mm) / 400D-60: Ø 19" (483mm) / 400D-120: Ø 38" (965mm)		
Sensor Length	400D-6: 6" (170mm) / 400D-10: 10" (250mm) / 400D-60: 60" (1524mm) / 400D-120: 120" (3048mm)		
Bandwidth	10Hz to 3kHz		
MODEL	4000D		
Display Range	40A _{AC}	400A _{AC}	4000A _{AC}
Measurement Range	0.20 to 39.99A	40.0 to 399.9A	400 to 3999A
Resolution	10mA	100mA	1A
Accuracy	±(2% + 10cts)	±(1.5% + 2cts)	±(1.5% + 2cts)
Sensor Diameter	4000D-14: Ø 3.94" (100mm) / 4000D-24: Ø 8" (190mm)		
Sensor Length	4000D-14: 14" (350mm) / 4000D-24: 24" (610mm)		
Bandwidth	10Hz to 3kHz		
MECHANICAL			
Power Supply	2 x 1.5V AAA / LR3 batteries		
Operating Temperature	32° to 122°F (0° to 50°C)		
Weight	approx. 0.29lbs (130g) MiniFlex / 1.7lbs (771g) AmpFlex		
Casing Dimensions	3.94 x 2.36 x 0.79" (100 x 60 x 20mm)		
Connection Cable Length	6ft (1.8m)		
Safety	IEC 61010, 600V CAT IV		

► FEATURES

- Easy access and measurement, even in confined spaces
- Measurement from 20mA_{AC} to 4000A (model dependent)
- Available with 6", 10", 14", 24", 60" and 120" sensor lengths
- Sensor diameter 1.77" to 38" (model dependent)
- Resolution down to 1mA (model dependent)
- HOLD feature
- Direct reading
- Compact and simple to use
- Flexible current sensor
- True RMS
- Safety rating of 600V CAT IV

► PRODUCT INCLUDES

Digital FlexProbe®, 2 AAA batteries and user manual.

CATALOG NO.	DESCRIPTION
2153.30	Digital FlexProbe® Model 400D-6 w/6' Lead (TRMS, 4A _{AC} , 40A _{AC} , 400A _{AC})
2153.31	Digital FlexProbe® Model 400D-10 w/6' Lead (TRMS, 4A _{AC} , 40A _{AC} , 400A _{AC})
2153.32	Digital FlexProbe® Model 4000D-14 w/6' Lead (TRMS, 40A _{AC} , 400A _{AC} , 4000A _{AC})
2153.33	Digital FlexProbe® Model 400D-60 w/6' Lead (TRMS, 4A _{AC} , 40A _{AC} , 400A _{AC})
2153.34	Digital FlexProbe® Model 400D-120 w/6' Lead (TRMS, 4A _{AC} , 40A _{AC} , 400A _{AC})
2153.35	Digital FlexProbe® Model 4000D-24 w/6' Lead (TRMS, 40A _{AC} , 400A _{AC} , 4000A _{AC})
Accessories (Optional)	
5000.44	MultiFix Multi-Position Magnetic Accessory (available on website storefront)

CAT IV RATED CLAMP-ON METERS

200, 400 & 600 Series General Purpose Meters



Models 203/403/603 & 205/405/605

Users can be sure of working in a higher degree of safety with 1000V CAT IV rated meters (model dependent)



*Models 203 & 205 only

► FEATURES

- 1000V CAT IV Rated (Models 403/603 & 405/605)
- UL 94 VI flame retardant self-extinguishing
- IP54 Rated
- 10,000-count (400 & 600 Series) and 6000 count (200 Series) blue electroluminescent backlit display
- Measures up to 1000V_{AC} (1400V peak), 1000V_{DC} and AC+DC with resolution to 10mV
- Measures up to 2000A_{AC} and 3000A_{DC} (model dependent)
- Measures single- and three-phase power (real, reactive and apparent) up to 3MW with resolution to 1W (model dependent)
- Measures W, VA, var and PF for 1 Φ & 3 Φ balanced systems (Models 205, 405 & 605)
- Measures frequency to 20kHz with 0.1Hz resolution
- Auto selects AC or DC measurement voltage
- True InRush[®] current measurement with 1mS capture
- Jaw opening up to 1.33" (34mm) (200 series), 1.89" (48mm) (400 series) and 2.36" (60mm) (600 series)
- K-thermocouple and adapter included (Models 203, 403 & 603)

► SPECIFICATIONS

MODELS	203/403/603 TRMS	205/405/605 TRMS
ELECTRICAL		
Current AC (rms)	600/1000/2000A	600/1000/2000A
Current DC	900/1500/3000A	900/1500/3000A
Current AC+DC	–	900/1500/3000A
Voltage AC (rms)	1000/1000/1000V	1000/1000/1000V
Voltage DC	1000/1000/1000V	1000/1000/1000V
Voltage AC+DC	–	1000/1000/1000V
Ohms	60/100/100k Ω	60/100/100k Ω
Continuity (Buzzer)	Yes (< 40 Ω)	Yes (< 40 Ω)
Diode Test	Yes	Yes
Total Harmonic Distortion	–	Yes
Single- and 3-Phase Real Power (AC, DC, AC/DC)*	–	600/1000/2000kW 3000/6000kW
Single- and 3-Phase Reactive Power (AC, DC, AC/DC)*	–	600/1000/2000kvar 3000/6000kvar
Single- and 3-Phase Apparent Power (AC, DC, AC/DC)*	–	600/1000/2000kVA 3000/6000kVA
Temperature (int., ext., C°, F°)	Yes	–
Voltage Frequency (Hz)	20kHz	20kHz
Current Frequency (Hz)	3/2/1kHz	3/2/1kHz
Power Function (W, var, VA)	–	Yes
Power Factor	–	Yes
THD-r/THD-f	–	Yes
Adapter (AC/DC)	0 to 6V	–
Phase Rotation	–	Yes (2 wire)
Auto AC/DC	Yes (V & A)	Yes (V & A)
Auto Power OFF	Yes	Yes
Hold Button	Yes	Yes
Backlight Button	Yes	Yes
Min/Max Button	Yes	Yes
True InRush [®] Function	Yes	Yes
Relative Function	Yes	Yes
Peak \pm Function	–	Yes
Hz Button	Yes	Yes

*3-phase measurements assume balanced load

CATALOG NO.	DESCRIPTION
2139.12	Clamp-On Meter Model 203 (TRMS, 1000V _{AC/DC} , 600A _{AC} /900A _{DC} , Ohms, Continuity, Temperature)
2139.40	Power Clamp-On Meter Model 205 (TRMS, 1000V _{AC/DC} , 600A _{AC} /900A _{DC} , Ohms, Continuity, Phase Rotation, Power, THD)
2139.21	Clamp-On Meter Model 403 (TRMS, 1000V _{AC/DC} , 1000A _{AC} /1500A _{DC} , Ohms, Continuity, Temperature)
2139.50	Power Clamp-On Meter Model 405 (TRMS, 1000V _{AC/DC} , 1000A _{AC} /1500A _{DC} , Phase Rotation, Ohms, Continuity, Power, THD)
2139.31	Clamp-On Meter Model 603 (TRMS, 1000V _{AC/DC} , 2000A _{AC} /3000A _{DC} , Ohms, Continuity, Temperature)
2139.60	Power Clamp-On Meter Model 605 (TRMS, 1000V _{AC/DC} , 2000A _{AC} /3000A _{DC} , Phase Rotation, Ohms, Continuity, Power, THD)



Technical Assistance (800) 343-1391

CAT IV RATED POWER CLAMP-ON METERS

400 & 600 Series *Bluetooth* Edition Power and Harmonic Meters

Models 407 & 607

Now available with Android™ mobile application



► SPECIFICATIONS

MODELS	407 TRMS	607 TRMS
ELECTRICAL		
Current AC (rms)	1000A	2000A
Current DC	1500A	3000A
Current AC+DC	1500A Peak	3000A Peak
Voltage AC (rms)	1000V	1000V
Voltage DC	1000V	1000V
Voltage AC+DC	1000V	1000V
Ohms	100kΩ	100kΩ
Continuity (Buzzer)	Yes (< 40Ω)	Yes (< 40Ω)
Total Harmonic Distortion	Yes	Yes
Individual Harmonics (to 25 th)	Yes	Yes
Single- and 3-Phase Real Power (AC, DC, AC/DC)*	1000kW 3000kW	2000kW 6000kW
Single- and 3-Phase Reactive Power (AC, DC, AC/DC)*	1000kvar 3000kvar	2000kvar 6000kvar
Single- and 3-Phase Apparent Power (AC, DC, AC/DC)*	1000kVA 3000kVA	2000kVA 6000kVA
Voltage Frequency (Hz)	20kHz	20kHz
Current Frequency (Hz)	2kHz	1kHz
Power Function (W, var, VA)	Yes	Yes
Power Factor	Yes	Yes
THD-r/THD-f	Yes	Yes
Auto AC/DC	Yes (V & A)	Yes (V & A)
Auto Power OFF	Yes	Yes
Hold Button	Yes	Yes
Backlight Button	Yes	Yes
Min/Max Button	Yes	Yes
True InRush® Function	Yes	Yes
Peak ± Function	Yes	Yes
Harmonics Function	Yes	Yes
Rec (Record) Function	Yes	Yes
Wireless BT (Bluetooth) Function	Yes	Yes
Record (Recordings)	1000	1000
Hz Button	Yes	Yes

*3-phase measurements assume balanced load

► PRODUCT INCLUDES

Models 407 & 607

Hard carrying case, set of two color-coded silicone test leads, test probes and alligator clips, Bluetooth USB adapter, four 1.5V AA batteries, safety information sheet, and USB drive supplied with DataView® software and user manual.



► FEATURES

- 1000V CAT IV Rated
- UL 94 VI flame retardant self-extinguishing
- IP54 Rated
- 10,000-count blue electroluminescent backlit display
- Measures up to 1000V_{AC} (1400V peak), 1000V_{DC} and AC+DC with resolution to 10mV
- Measures up to 2000A_{AC} and 3000A_{DC} (Model 607)
- Measures W, VA, var and PF for 1Φ & 3Φ balanced systems
- Measures single- and three-phase power (real, reactive and apparent) up to 3MW with resolution to 1W
- Measures frequency to 20kHz with 0.1Hz resolution
- Auto selects AC or DC measurement
- True InRush® current measurement with 1mS capture
- Measures harmonics up to the 25th
- Records up to 1000 measurements
- Bluetooth communication (communicates up to 30ft)
- Includes FREE DataView® software for download and report generation
- Jaw opening up to 1.89" (48mm) (400 series) and up to 2.36" (60mm) (600 series)


CATALOG NO. DESCRIPTION

2139.51	Power Clamp-On Meter Model 407 (TRMS, 1000V _{AC} /DC, 1000A _{AC} /1500A _{DC} , Ohms, Continuity, Energy, Harmonics, Power, THD, Recording)
2139.61	Power Clamp-On Meter Model 607 (TRMS, 1000V _{AC} /DC, 2000A _{AC} /3000A _{DC} , Ohms, Continuity, Energy, Harmonics, Power, THD, Recording)




DUAL DISPLAY CLAMP-ON METERS

670 Series



Model 670
Jaw Opening: 1.65" (42mm)
Conductor Size: one 750kcmil cable or two 350kcmil cables



Model 675
Jaw Opening: 1.58" (40mm)
Conductor Size: one 750kcmil cable or two 350kcmil cables

Models 670 & 675

Dual display simultaneously measures and displays voltage and current!

► SPECIFICATIONS

MODELS	670 TRMS			675 TRMS		
ELECTRICAL						
AC Current						
Measuring Range	0.00 to 99.99A	100 to 1000A	0.00 to 99.99A	100 to 1000A		
Resolution	0.01A	0.1A	0.01A	0.1A		
Accuracy	1.5% of Reading ±5cts (50 to 60Hz) 2.0% of Reading ±5cts (60 to 500Hz) 4.5% of Reading ±5cts (500Hz to 3kHz)		1.5% of Reading ±5cts (50 to 60Hz) 2.0% of Reading ±5cts (60 to 500Hz) 4.5% of Reading ±5cts (500Hz to 3kHz)			
DC Current						
Measuring Range			0.00 to 99.99A	100.0 to 999.9A	1000 to 1400A	
Resolution			0.01A	0.1A	1A	
Accuracy			1.2% of Reading ±5cts	2.5% of Reading ±5cts	2.5% of Reading ±5cts	
AC Voltage						
Measuring Range	0.0 to 999.9V			0.0 to 999.9V		
Resolution	0.1V			0.1V		
Accuracy	1.0% of Reading ±5cts (50 to 60Hz) 1.2% of Reading ±5cts (60 to 500Hz) 2.5% of Reading ±5cts (500Hz to 3kHz)			1.0% of Reading ±5cts (50 to 60Hz) 1.2% of Reading ±5cts (60 to 500Hz) 2.5% of Reading ±5cts (500Hz to 3kHz)		
Input Resistance	1MΩ			1MΩ		
DC Voltage						
Measuring Range	0.0 to 999.9V	1000 to 1400V	0.0 to 999.9V	1000 to 1400V		
Resolution	0.1V	1V	0.1V	1V		
Accuracy	1% of Reading ±2cts		1% of Reading ±2cts			
Input Resistance	1MΩ			1MΩ		
Resistance-Ohms (Ω)						
Measuring Range	0.0 to 999.9Ω	1000 to 9999Ω	0.0 to 999.9Ω	1000 to 9999Ω		
Resolution	0.1Ω	1Ω	0.1Ω	1Ω		
Accuracy	1% of Reading ±3cts, 3.3V _{DC} (V _{max})		1% of Reading ±3cts, 3.3V _{DC} (V _{max})			
Continuity (•••••)						
Beeper Activation	< 35Ω		< 35Ω			
Accuracy	1% of Reading ±3cts, 3.3V _{DC} (V _{max})		1% of Reading ±3cts, 3.3V _{DC} (V _{max})			
Frequency (Hz)						
Function	A - Hz	V - Hz	A - Hz	V - Hz		
Range	1000Hz	10,000Hz	1000Hz	10,000Hz		
Resolution	0.1Hz	1Hz	0.1Hz	1Hz		
Accuracy	1.0% of Reading ±2cts		1.0% of Reading ±2cts			
Temperature (°C/°F)						
Measuring Range	-40° to 999.5°C	1000° to 1200°C	-40° to 2192°F	-40° to 999.5°C	1000° to 1200°C	-40° to 2192°F
Resolution	0.5°C	1°C	1°F	0.5°C	1°C	1°F
GENERAL						
Power Supply	One 9V, NEDA 1604 (6F22) Alkaline battery (included)					
Battery Life	(no buzzer or backlight) 35 hours			(no buzzer or backlight) 30 hours		
MECHANICAL						
Digital Display	3 ¾ digits LCD dual display (max reading 9999)			3 ¾ digits LCD dual display (max reading 9999)		
Jaw Opening	1.65" (42mm)			1.58" (40mm)		
ENVIRONMENTAL						
Operating Temperature	*-14° to 122°F (-25 to 50°C), 80% RH, non-condensing			*-14° to 122°F (-25 to 50°C), 80% RH, non-condensing		



► FEATURES

- Dual display
- Standard size, full function clamp-on meter
- 1000AAC/DC current measurements (DC current on Model 675 only)
- 1400V_{DC} volt measurements
- TRMS measurements
- Resistance measurement to 10,000Ω
- Continuity with beeper below 35Ω
- Frequency measurements from V and A inputs
- 1ms peak function for fast capture of signals
- Hold function to "freeze" readings
- Designed to measure amps and volts at the same time
- Push-button for easy A_{DC} zeroing
- Large, easy-to-read 10,000-count, backlit LCD display
- Includes test leads and soft carrying case

► PRODUCT INCLUDES



Soft carrying case, set of test leads (red/black with safety needle tips), K-type thermocouple, one 9V battery and a user manual.

*Note: If the meter is to be used below 32°F (0°C), we suggest that the battery be replaced to ensure proper results.

CATALOG NO.	DESCRIPTION
2117.49	Clamp-On Meter Model 670 (Dual Display, TRMS, AC Amps, AC/DC Volts, Ohms, Continuity, Frequency, & Temperature)
2117.50	Clamp-On Meter Model 675 (Dual Display, TRMS, AC/DC Amps & Volts, Ohms, Continuity, Frequency & Temperature)




Technical Assistance (800) 343-1391

COMPACT SIZE CLAMP-ON METERS

500 Series

Model 503

Small compact size clamp-meter that fits comfortably in a tool bag



Model 503
Jaw Opening: 1.1" (28mm)
Conductor Size: one 500kcmil cable



SPECIFICATIONS

MODEL	503
AC Current (Auto-Ranging)	0.05 to 400A
Resolution	0.01A and 0.1A
Accuracy 50 to 60Hz 60 to 500Hz	±1.5% of Reading ±10cts ±2.5% of Reading ±10cts
AC Voltage (Auto-Ranging)	0.5 to 600V
Resolution	0.1V and 1V
Accuracy 50 to 60Hz 60 to 500Hz	±0.8% of Reading ±5cts ±1.5% of Reading ±5cts
Input Impedance	10MΩ
DC Current (Auto-Ranging)	0.10 to 400A
Resolution	0.01A and 0.1A
Accuracy	±2.5% of Reading ±10cts
DC Voltage (Auto-Ranging)	0.2 to 600V
Resolution	0.1V and 1V
Accuracy	±1% of Reading ±2cts
Input Impedance	10MΩ
Resistance	0.2 to 400Ω
Accuracy	±1% of Reading ±2cts
Max Test Voltage	1.5Vdc
Continuity	<40Ω
Max Test Voltage	1.5Vdc
Power Source	Two 1.5V AAA batteries (included)



FEATURES

- Compact size - fits into your pocket
- 400Aac or 400Aac/dc current measurements
- 600VAc/dc volts measurements
- Resistance measurements to 400Ω
- Continuity with beeper below 40Ω
- Hold function to “freeze” readings
- Push-button for easy A/dc zeroing
- Large, easy-to-read 4000-count LCD display
- 42-segment analog bargraph
- Includes test leads and soft carrying pouch

PRODUCT INCLUDES


Soft carrying case, set of two test leads, two 1.5V AAA batteries and user manual.



CATALOG NO.	DESCRIPTION
2117.22	Clamp-On Meter Model 503 (AC/DC, 400Aac/dc, 600VAc/dc, Ohms, Continuity)

COMPACT SIZE CLAMP-ON METERS

500 Series



Models 512 & 514
 Jaw Opening: 1.575" (40mm)
 Conductor Size: one 750kcmil
 cable or two 350kcmil cables

Models 512 & 514

Full ranges and compliance to international safety and quality standards ensure a professional and reliable tool



► FEATURES

- Standard size, full function clamp-on meter
- 1000A_{AC} or 1000A_{AC/DC} current measurements
- 750V_{AC} or 1000V_{DC} volt measurements
- TRMS measurements
- Resistance measurements to 4000Ω
- Continuity with beeper below 40Ω
- Frequency measurements from V and A
- Diode test
- 1ms peak function for fast capture of signals
- Hold function to “freeze” readings
- Push-button for easy A_{DC} zeroing
- Large, easy-to-read, 4000-count LCD display
- 42-segment analog bargraph
- Includes test leads, soft carrying pouch and batteries

*Note: If Model 514 is to be used below 32°F (0°C), we suggest that the battery be replaced to ensure proper results.

► SPECIFICATIONS

MODELS	512 TRMS	514 TRMS
AC Current (Auto-Ranging)	0.05 to 1000Arms	0.05 to 1000Arms
Resolution	0.01A, 0.1A and 1A	0.01A, 0.1A and 1A
Accuracy	50 to 60Hz: 1.9% of Reading ±5cts 60 to 500Hz: 1.9% of Reading ±5cts	1.9% of Reading ±5cts 2.5% of Reading ±5cts
AC Voltage (Auto-Ranging)	0.5 to 750Vrms	0.5 to 750Vrms
Resolution	0.1V and 1V	0.1V and 1Vrms
Accuracy	60 to 500Hz: 1.2% of Reading ±5cts	1.5% of Reading ±5cts
Input Impedance	10MΩ	10MΩ
DC Current (Auto-Ranging)	–	1A to 1000A
Resolution	–	0.01A, 0.1A and 1A
Accuracy	–	±2.5% of Reading ±10cts
DC Voltage (Auto-Ranging)	0.2 to 1000V	0.2 to 1000V
Resolution	0.1V and 1V	0.1V and 1Vrms
Accuracy	0.75% of Reading ±2cts	1% of Reading ±2cts
Input Impedance	10MΩ	10MΩ
Resistance	0.2 to 4000Ω	0.2 to 4000Ω
Accuracy	1% of Reading ±2cts	1% of Reading ±2cts
Max Test Voltage	3Vdc	3Vdc
Diode Test	0.6mA	1.7mA
Open Circuit Voltage	3Vdc	3Vdc
Continuity	<40Ω	<40Ω
Max Test Voltage	3Vdc	3Vdc
Frequency (Auto-Ranging)		
CURRENT INPUT		
Range	4kHz 10kHz	1Hz Resolution 10Hz Resolution
Accuracy	20Hz to 10kHz: 0.1% of Reading ±1ct	0.1% of Reading ±1ct
Min Input Signal	4kHz: 2Arms 10kHz: –	2Arms 5Arms
VOLTAGE INPUT		
Range	4kHz 10kHz	1Hz Resolution 10Hz Resolution
Accuracy	10Hz to 10kHz: 0.1% of Reading ±1ct	0.1% of Reading ±1ct
Min Input Signal	4kHz: 5Vrms 10kHz: 5Vrms	5Vrms 10Vrms
Power Source	9V Alkaline battery (included)	
ENVIRONMENTAL		
Operating Temperature	32° to 104°F (0° to 40°C) < 80% RH, non-condensing	*-14° to 122°F (-25° to 50°C), 80% RH, non-condensing



► PRODUCT INCLUDES

Soft carrying case, set of two test leads, 9V battery and user manual.

CATALOG NO.	DESCRIPTION
2117.68	Clamp-On Meter Model 512 (TRMS, 1000A _{AC} , 750V _{AC} /1000V _{DC} , Ohms, Continuity, Hz)
2117.70	Clamp-On Meter Model 514 (AC/DC, TRMS, 1000A _{AC/DC} , 750V _{AC} /1000V _{DC} , Ohms, Continuity, Hz)



Technical Assistance (800) 343-1391

GENERAL INDUSTRIAL GRADE CLAMP-ON METERS

100A_{AC}/DC Low Current

Model CM605

For general industrial monitoring and troubleshooting

► SPECIFICATIONS

MODEL	CM605
ELECTRICAL	
AC Current	
Measurement Ranges	2 Ranges: 10A, 100A
Accuracy & Resolution	10A: 2.0% of Reading ±10cts - 1mA Resolution 80A: 2.0% of Reading ±10cts - 10mA Resolution > 80A: 3.5% of Reading ±10cts - 10mA Resolution
Frequency Range	2 Ranges: 50 to 500Hz
DC Current (positive only)	
Measurement Ranges	2 Ranges: 10A, 100A
Accuracy & Resolution	10A: 2.5% of Reading ±10cts - 1mA Resolution 80A: 2.5% of Reading ±10cts - 10mA Resolution > 80A: 4.5% of Reading ±10cts - 10mA Resolution
AC Volts	
Measurement Ranges	600Vrms
Accuracy & Resolution	1.5% of Reading ±5cts - 100mV Resolution
Frequency	40 to 500Hz
Input Impedance	10MΩ, < 50pF
DC Volts (positive only)*	
Measurement Ranges	600V
Accuracy & Resolution	1.0% of Reading ±2cts - 100mV Resolution
Input Impedance	10MΩ
Resistance (Ohms)	
Measurement Ranges	10kΩ (9999Ω)
Accuracy & Resolution	1.0% of Reading ±3cts - 1Ω Resolution
Test Voltage	< 3.0V _{DC}
Continuity	
Measurement Ranges	Buzzer < 100Ω ±25Ω
Resolution	1Ω
Test Voltage	< 3.0V _{DC}
Analog Output	
Output	10mV/A _{AC} & A _{DC} through front banana jacks
Frequency	0 to 20kHz @ ±3db
Output Impedance	3kΩ, < 50pF
Other Functions	
A _{DC} Zero & Relative Function	One touch push button (ΔZERO Button) to Zero A _{DC} , or other readings. Relative function also used in the other ranges to compare two measurements.
HOLD Function	Holds A & V measurements when pressed (HOLD button)
PEAK Function	Captures PEAK (1ms) V or A measurement when activated (PEAK Button)
Auto-Ranging	"AUTO" displayed on LCD
Over Range	"OL" displayed on LCD for all measurements
Auto Power OFF	Auto Power OFF after approx 10 minute with Over-Ride
Low Battery	Low Battery indication on LCD
MECHANICAL	
Max. Cable Diameter	Ø 0.45" (12mm)
Max. Jaw Opening	Ø 0.60" (15mm)
Power Source	Two 1.5V AAA (LR03) batteries (included)
Dimensions & Weight	7.95 x 2.76 x 1.33" (202 x 70 x 34mm) – 6.5oz (180g)
Safety Standards	IEC/EN 61010-1 and 2-032 – 600V CAT II and 300V CAT III – Pollution Degree 2 Class 2 – Double or reinforced insulation, CE mark

*For negative measurement, add 2cts to the accuracy

► PRODUCT INCLUDES

Soft carrying case, set of two test leads, two 1.5V AAA batteries and user manual.



► FEATURES

- 10,000-count LCD display - excellent resolution
- 100A_{AC}/DC Ammeter with low 10A range (1mA resolution)
- Tapered jaws for crowded wiring areas:
Jaw opening: Ø 0.60" - 15mm
Cable diameter: Ø 0.45" - 12mm
- 600V_{AC}/DC voltmeter
- Analog output in A_{AC}/DC to data loggers, etc
- Auto-ranging & A_{DC} zero push-button
- Data HOLD & PEAK functions
- Relative function to compare two measurements
- Ohm range & continuity test with beeper
- Auto Power OFF and low battery indicator
- IEC/EN 61010 safety rated & CE mark
- 600Vrms overload protection

CATALOG NO.	DESCRIPTION
7000.02	Clamp-On Meter Model CM605 (100A _{AC} /DC, Low Current)

LEAKAGE CURRENT METER

TRMS Clamp-On Leakage Current Meter



Model 565

Designed to measure low AC currents, which are typically leakage currents in ground conductors



► SPECIFICATIONS

MODEL		565 TRMS	
mA AC Current (TRMS, Auto-Ranging)		0 to 600mA	
Resolution	60mA 600mA	0.01mA (10µA) 0.1mA (100µA)	
Accuracy	50 to 60Hz 50 to 500Hz 500Hz to 3kHz	1.2% of Reading ±5cts 2.5% of Reading ±5cts 3.5% of Reading ±10cts	
AC Current (TRMS, Auto-Ranging)		10 to 100A	
Resolution	10A 100A	0.001A (1mA) 0.01A (10mA)	
Accuracy	50 to 60Hz 50 to 500Hz 500Hz to 3kHz	1.0% of Reading ±5cts 1.2% of Reading ±5cts 2.5% of Reading ±10cts	
AC Voltage (TRMS)		0 to 600V	
Accuracy	50 to 60Hz 50 to 500Hz 500Hz to 3kHz	1.0% of Reading ±5cts 1.2% of Reading ±5cts 2.5% of Reading ±10cts	
DC Voltage		0 to 600V	
Resolution		0.1V	
Accuracy		1.0% of Reading ±3cts	
Resistance		0 to 1kΩ	
Accuracy		1.0% of Reading ±3cts	
Continuity		Buzzer activates <35Ω (0 to 1kΩ)	
Frequency (Auto-Ranging)			
Function		A-Hz	V-Hz
Resolution	0 to 100Hz 100Hz to 1kHz	0.1Hz 1Hz	0.1Hz 1Hz
Sensitivity		10mArms min	
Accuracy		0.5% of Reading ±2cts	
Filter		On (50/60Hz only); Off (Full frequency range)	
In-Rush		Max 100mS sample time	
Power Source		Two 1.5V AAA batteries (included)	



► FEATURES

- Check for leakage and locate insulation breakdowns on live circuits
- Measures leakage current down to 0.1mA with up to 10µA resolution
- Measures current up to 100Arms
- Measures up to 600VAC/DC
- Measures Hz on either V or A inputs
- Measures resistance and continuity
- Hold feature freezes value
- Max feature keeps track of highest measured in-rush value
- Zero button ideal for measuring relative values
- Filter to isolate 50/60Hz fundamental from harmonics
- Compatible with VDE 0404
- Backlight LCD display

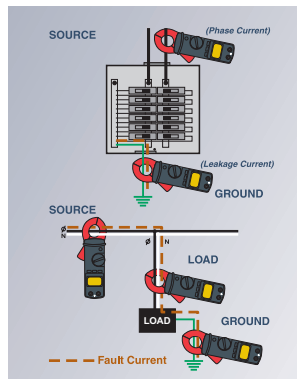

Jaw Opening: 1.10" (28mm)
Conductor Size: 1" (26mm)



► PRODUCT INCLUDES

Two color-coded 5ft test leads, carrying case, batteries and user manual.

CATALOG NO.	DESCRIPTION
-------------	-------------

2117.56 Clamp-On Leakage Current Meter Model 565 (TRMS, 60mA, 600mA, 10A, 100A, 600VAC/DC, Hz, Ohms, Continuity)



Technical Assistance (800) 343-1391

SELECTION CHART

MODELS	Type	AC Current	AC Voltage	DC Current	DC Voltage	Resistance (Ω)
203	AC/DC TRMS	600A	1000V	900A	1000V	60k Ω
205	AC/DC TRMS	600A	1000V	900A	1000V	60k Ω
403	AC/DC TRMS	1000A	1000V	1500A	1000V	100k Ω
405	AC/DC TRMS	1000A	1000V	1500A	1000V	100k Ω
407	AC/DC TRMS	1000A	1000V	1500A	1000V	100k Ω
603	AC/DC TRMS	2000A	1000V	3000A	1000V	100k Ω
605	AC/DC TRMS	2000A	1000V	3000A	1000V	100k Ω
607	AC/DC TRMS	2000A	1000V	3000A	1000V	100k Ω
400D	AC	0.020 to 400A	-	-	-	-
4000D	AC	0.20 to 4000A	-	-	-	-
503	AC/DC	0.05 to 400A	0.5 to 600V	0.10 to 400A	0.2 to 600V	400 Ω
512	AC TRMS	0.05 to 1000A	0.5 to 750V	-	0.2 to 1000V	4000 Ω
514	AC/DC TRMS	0.05 to 1000A	0.5 to 750V	1 to 1000A	0.2 to 1000V	4000 Ω
565	AC TRMS	0 to 600mA; 10 to 100A	0 to 600V	-	0 to 600V	0 to 1k Ω
CM605	AC/DC	1mA to 100A	600Vrms	1mA to 100A	600V	0 to 9999 Ω
670	AC TRMS	0 to 1000A	0 to 1000V	-	1000 to 1400V	1000 to 10,000 Ω
675	AC/DC TRMS	0 to 1000A	0 to 1000V	0 to 1400A	0 to 1400V	0 to 9999 Ω

MODELS	Continuity	Frequency (Hz)		True RMS	Jaw Size	Dimensions	Catalog No.
		Current	Voltage				
203	<40Ω	3kHz	20kHz	✓	1.33" (34mm)	8.7 x 3.1 x 1.65"	2139.12
205	<40Ω	3kHz	20kHz	✓	1.33" (34mm)	8.7 x 3.1 x 1.65"	2139.40
403	<40Ω	2kHz	20kHz	✓	1.89" (48mm)	10.7 x 3.6 x 1.6"	2139.21
405	<40Ω	2kHz	20kHz	✓	1.89" (48mm)	10.7 x 3.6 x 1.6"	2139.50
407	<40Ω	2kHz	20kHz	✓	1.89" (48mm)	10.7 x 3.6 x 1.6"	2139.51
603	<40Ω	1kHz	20kHz	✓	2.36" (60mm)	11.65 x 4.37 x 1.61"	2139.31
605	<40Ω	1kHz	20kHz	✓	2.36" (60mm)	11.65 x 4.37 x 1.61"	2139.60
607	<40Ω	1kHz	20kHz	✓	2.36" (60mm)	11.65 x 4.37 x 1.61"	2139.61
400D	-	10Hz to 3kHz	-	✓	400D-6: 1.77" (45mm) 400D-10: 2.75" (70mm) 400D-60: 19" (483mm) 400D-120: 38" (965mm)	3.94 x 2.36 x 0.79"	2153.30 2153.31 2153.33 2153.34
4000D	-	10Hz to 3kHz	-	✓	4000D-14: 3.94" (100mm) 4000D-24: 8" (190mm)	3.94 x 2.36 x 0.79"	2153.32 2153.35
503	<40Ω	-	-	-	1.1" (28mm)	7.60 x 1.97 x 1.1"	2117.22
512	<40Ω	20Hz to 10kHz	10Hz to 10kHz	✓	1.58" (40mm)	9.53 x 2.60 x 1.42"	2117.68
514	<40Ω	20Hz to 10kHz	10Hz to 10kHz	✓	1.58" (40mm)	9.53 x 2.60 x 1.42"	2117.70
565	0 to 1kΩ	0 to 1kHz	0 to 1kHz	✓	1.1" (28mm)	8.5 x 2.5 x 1.18"	2117.56
CM605	Buzzer <100Ω ± 25Ω	50 to 500Hz	40 to 500Hz	-	0.60" (15mm)	7.95 x 2.76 x 1.33"	7000.02
670	<35Ω	1000Hz	10,000Hz	✓	1.65" (42mm)	10.71 x 3.15 x 1.69"	2117.49
675	<35Ω	1000Hz	10,000Hz	✓	1.58" (40mm)	10.12 x 3.15 x 1.69"	2117.50

United States & Canada

**Chauvin Arnoux[®], Inc.
d.b.a. AEMC[®] Instruments**

15 Faraday Drive
Dover, NH 03820 USA

Tel (508) 698-2115

Fax (508) 698-2118

Customer Support

Place orders, obtain prices
and delivery options

(800) 343-1391

customerservice@aemc.com

Sales & Marketing Department

sales@aemc.com

marketing@aemc.com

United States & Canada (continued)

Repair & Calibration Service

repair@aemc.com

Technical & Product

Application Support

(800) 343-1391

techinfo@aemc.com

**South America, Central America,
Mexico & the Caribbean**

Chauvin Arnoux[®], Inc.

d.b.a. AEMC[®] Instruments

15 Faraday Drive

Dover, NH 03820 USA

export@aemc.com

Australia & New Zealand

Chauvin Arnoux[®], Inc.

d.b.a. AEMC[®] Instruments

15 Faraday Drive

Dover, NH 03820 USA

export@aemc.com

All other countries

Chauvin Arnoux[®]

190, rue Championnet

75876 Paris Cedex 18, France

Tel 33 1 44 85 45 28

Fax 33 1 46 27 73 89

info@chauvin-arnoux.com

www.chauvin-arnoux.com

**Over 125 Years
Developing
Test and
Measurement
Instruments**

VOLUME 21

**AEMC[®]
INSTRUMENTS**
CHAUVIN ARNOUX GROUP

WWW.AEMC.COM
TECHNICAL HOTLINE: (800) 343-1391

- Cable Testers
- Clamp-On Meters
- Current Measurement Probes
- Data Loggers
- Digital Multimeters
- Electrical Test Tools
- Environmental Testers
- Ground Resistance Testers
- Leakage Current Meters & Probes
- Megohmmeters
- Micro-Ohmmeters
- Oscilloscopes
- Power Quality Analyzers, Meters & Loggers
- Test and Measurement (Lab) Instruments
- Thermal Imaging Cameras
- Transformer Ratio Meters

GROUND RESISTANCE TESTERS
For all of your Ground Integrity Testing needs...

POWER QUALITY
For all of your Power Quality needs...

MEG OHMMETERS
For all of your Insulation Testing needs...

Technical Hotline: (800) 343-1391
www.aemc.com

**AEMC[®]
INSTRUMENTS**
CHAUVIN ARNOUX GROUP

FAMILY of PRODUCTS

To learn more, contact us or visit our website: www.aemc.com

Call the AEMC[®] Instruments Technical Assistance Hotline for immediate consultation with an applications engineer: (800) 343-1391

AEMC[®] Instruments • 15 Faraday Dr. • Dover, NH 03820 USA • (800) 343-1391 • Fax (603) 742-2346 • E-mail: sales@aemc.com
Export Department: +1 (603) 749-6434 x520 • Fax +1 (603) 740-7550 • E-mail: export@aemc.com

950.BR-CLAMPON_0322 • Printed in the USA

© Chauvin Arnoux[®], Inc. d.b.a. AEMC[®] Instruments