


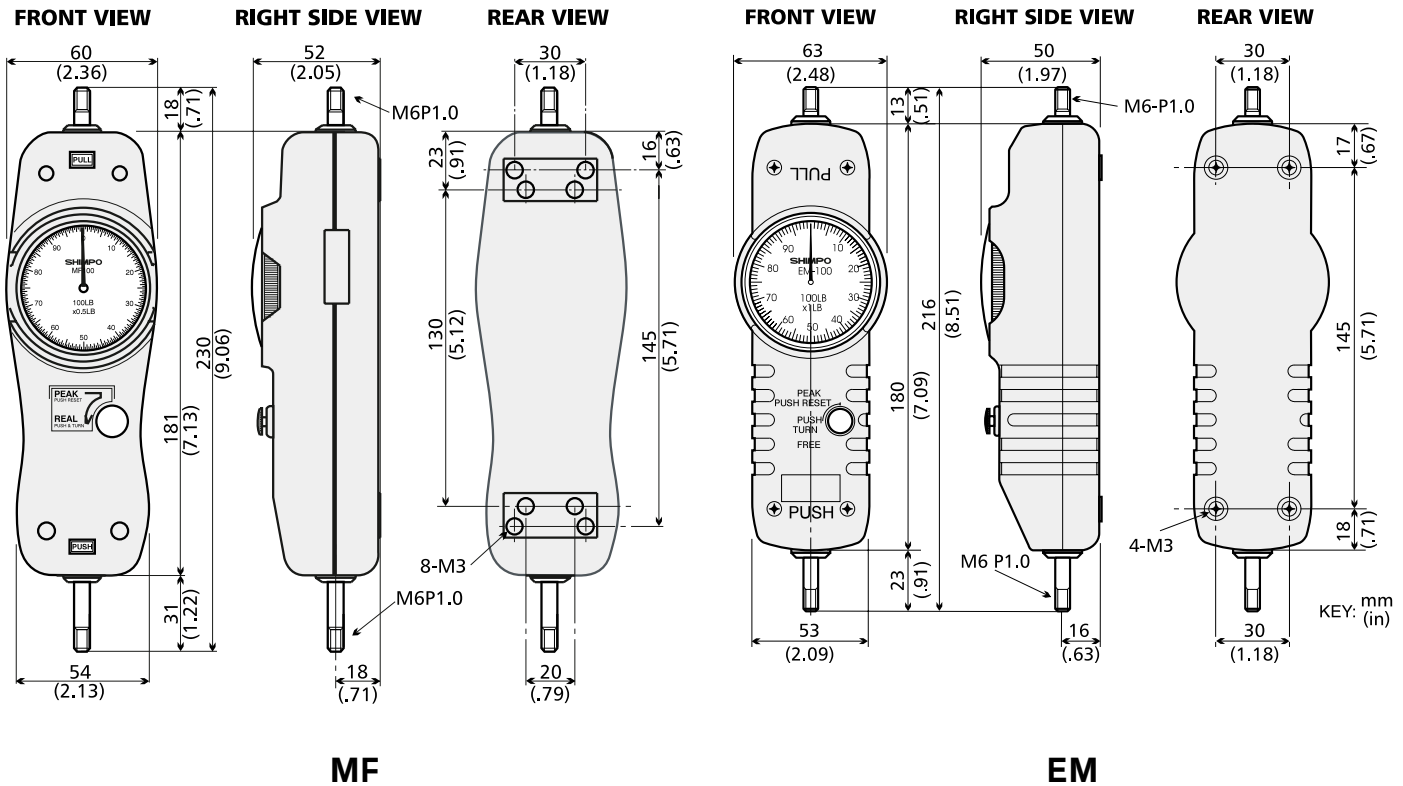

M F & E M S P E C I F I C A T I O N S	
Accuracy	± 0.2% F.S.
Display	Analog dial, 2" in diameter (50 mm); Rotatable 360° for taring purposes
Real/Peak Mode	Selectable
Display Update	Immediate
Overload Capacity	165 lb (75 kg)
Standard Accessories	Carrying case and 6 attachments (flat head, hook, chisel, notched head, cone head and extension rod) The MF Series also includes a large hook and large V-hook
OPTIONAL ACCESSORIES	Test stands, handle and attachments

M F S E R I E S (A L U M I N U M H O U S I N G)								
ENGLISH DIAL								
Model	MF-2	MF-5	MF-10	MF-20	MF-30	MF-50	MF-100	
Capacity	2 lb	5 lb	10 lb	20 lb	30 lb	50 lb	100 lb	
Dial Graduation	0.01 lb	0.025 lb	0.05 lb	0.1 lb	0.2 lb	0.25 lb	0.5 lb	
METRIC DIAL								
Model	MF-1KG	MF-2KG	MF-3KG	MF-5KG	MF-10KG	MF-20KG	MF-30KG	MF-50KG
Capacity	1 kg	2 kg	3 kg	5 kg	10 kg	20 kg	30 kg	50 kg
Dial Graduation	0.005 kg	0.01 kg	0.02 kg	0.025 kg	0.05 kg	0.1 kg	0.2 kg	0.25 kg

E M S E R I E S (A B S H O U S I N G)								
ENGLISH DIAL								
Model	EM-2	EM-5	EM-10	EM-20	EM-30	EM-50	EM-100	
Capacity	2 lb	5 lb	10 lb	20 lb	30 lb	50 lb	100 lb	
Dial Graduation	0.02 lb	0.05 lb	0.1 lb	0.2 lb	0.2 lb	0.5 lb	1 lb	
METRIC DIAL								
Model	EM-1KG	EM-2KG	EM-3KG	EM-5KG	EM-10KG	EM-20KG	EM-30KG	EM-50KG
Capacity	1 kg	2 kg	3 kg	5 kg	10 kg	20 kg	30 kg	50 kg
Dial Graduation	0.01 kg	0.02 kg	0.02 kg	0.05 kg	0.1 kg	0.2 kg	0.2 kg	0.5 kg