


Ashcroft Test Gauges 2 1/2", 3"

- Accuracy, PSI and kPa:
±0.5%; "H₂O: 2.5%

PSI and kPa have a Bourdon tube and socket assembly of AISI type 316SS. Connection is made via a 1/4" male NPT lower stem.

The "H₂O gauge socket is brass; connection is a standard 1/4" male NPT.

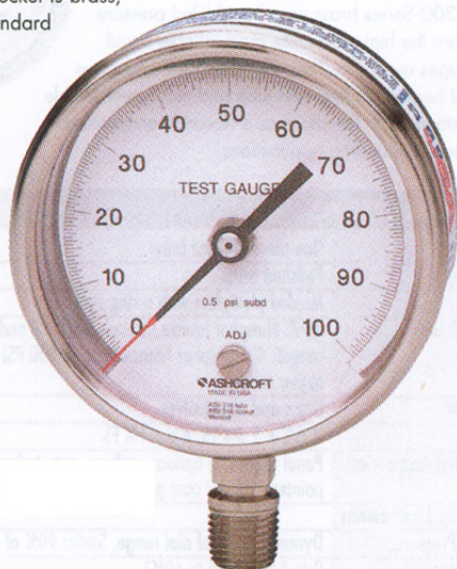

ORDERING INFORMATION

TN4903P	3" Protective Cover
CPRE24	Transcat Certified Calibration
DPRE24	Transcat Certified Plus Calibration

SPECIFICATIONS AND ORDERING INFORMATION

	Range	Figure Interval	Minor	Catalog Number	Price
PSI 3"	0-15	1	0.1	TN4900P-15	
	0-30	2	0.2	TN4900P-30	
	0-60	5	0.3	TN4900P-60	
	0-100	10	1	TN4900P-100	
	0-150	10	1	TN4900P-150	
	0-200	20	2	TN4900P-200	
	0-300	20	2	TN4900P-300	
	0-400	50	2	TN4900P-400	
	0-600	50	5	TN4900P-600	
	0-800	100	5	TN4900P-800	
	0-1000	100	10	TN4900P-1000	
	0-100	10	1	TN4901P-100	
kPa 3"	0-160	20	2	TN4901P-160	
	0-300	20	2	TN4901P-300	
	0-400	50	2	TN4901P-400	
	0-700	50	5	TN4901P-700	
	0-1100	100	10	TN4901P-1100	
	0-1400	100	10	TN4901P-1400	
	0-2000	200	20	TN4901P-2000	
	0-2800	200	20	TN4901P-2800	
	0-4000	500	20	TN4901P-4000	
	0-7000	500	50	TN4901P-7000	
Vacuum	30 "Hg	2	0.2	TN4902P	
Inches of Water 2 1/2"	0-10	1	0.1	TN7114P-10	
	0-15	5	0.2	TN7114P-15	
	0-30	5	0.5	TN7114P-30	
	0-60	10	1	TN7114P-60	
	0-100	10	1	TN7114P-100	
	0-160	20	2	TN7114P-160	
	0-200	20	2	TN7114P-200	
	0-300	50	5	TN7114P-300	