

RF EMF Strength Meter

TRANSCAT


▶ Visit us at Transcat.com!

35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001

High Frequency measurement for EMF
Monitor high frequency radiation in the 50MHz to 3.5GHz frequency range

Features:

- For electromagnetic field strength measurement including mobile phones, cell phones, base stations, and microwave leakage
- Non-directional (isotropic) measurement with three-channel (triaxial) measurement probe
- Max Hold and Average functions
- Manual store/recall up to 99 sets
- Level exceed audible alarm with user selectable threshold
- Complete with 9V battery and carrying case

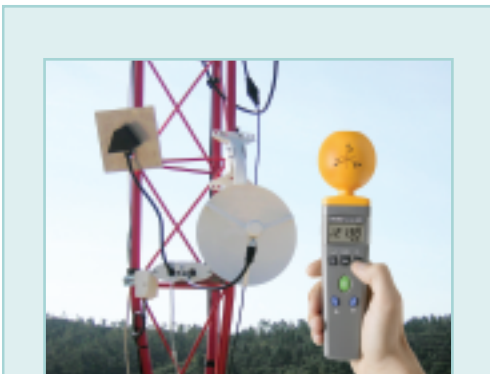

Applications

- RF electromagnetic wave field strength measurements
- Mobil phone base station antenna radiation power density measurement
- Radiation safety level tests
- Locating RF "Hot Spots" in the workplace or at home
- Microwave oven leakage tests
- RF "Electrosmog" detection
- Wireless network (Wi-Fi) RF detection

TRANSCAT

▶ Visit us at Transcat.com!

35 Vantage Point Drive Rochester, NY 14624
Call 1.800.800.5001

| Specifications | |
|------------------|--|
| Sensor Type | Electric Field |
| Frequency Range | 50MHz to 3.5GHz |
| Units of Measure | mV/m, V/m, μ A/m, mA/m, μ W/m ² , mW/m ² , W/m ² , μ W/cm ² , mW/cm ² |
| Measuring Ranges | 20mV/m to 108.0V/m 53 μ A/m to 286.4mA/m 1 μ W/m ² to 30.93W/m ² 0 μ W/cm ² to 3.093mW/cm ² |
| Resolution | 0.1mV/m, 0.1 μ A/m, 0.001 μ W/m ² , 0.001 μ W/cm ² |
| Audible Alarm | Adjustable threshold with On/Off |
| Memory | Manual store/recall of 99 sets |
| Dimensions | 9.3 x 2.4 x 2.4" (237 x 60 x 60mm) |
| Weight | 7oz (200g) |

Ordering Information:

480836RF Electromagnetic Field Strength Meter

