

35 Vantage Point Drive Rochester, NY 14624 Call 1.800.800.5001

Model 1296 BNC (Male) To Double Stacking Binding Post Jacks

- .66 (16,76)

2.24

(56, 90)

MIN.

4,22)

(CLOSED)

2.48


(62, 99)

MAX.

(OPEN)

.66

(16,76)

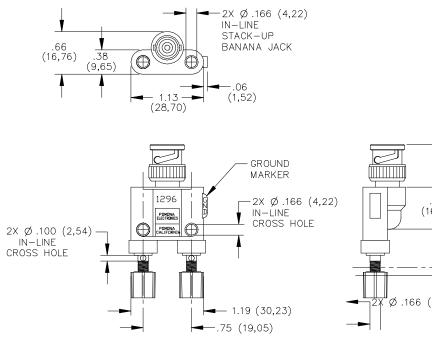

FEATURES:

Pomona®

- Converts BNC based test instruments to double binding posts with banana jacks.
- Binding Posts can be vertically and horizontally stacked for test versatility.
- Wires, spade lugs, pin tip plugs and banana plugs can be attached by means of the insulated knurled thumb knob.
- Insulated thumb knob is captive to prevent misplacement.
- BNC features Nickel Plated, Beryllium Copper for tarnish resistance & long insertion life.
- BNC center contact is Gold Plated, Brass for low contact resistance
- BNC shell is plated for tarnish resistance.

MATERIALS:

BNC (Male): Body: Brass, Nickel Plated Dielectric: PTFE

Center Contact: Brass, Gold Plated Impedance: 50 Ohms Insulation: ABS Molded to BNC (Male) and Binding Post Bodies, Color: Black Marking: "1296 POMONA ELECTRONICS POMONA CALIFORNIA" Binding Post: Body – Brass, Nickel Plated Insulated Thumb Knob – Polycarbonate, Color: One Black, One Red

RATINGS:

Voltage: Hand-held testing: 30VAC/60VDC Max. Hands free testing in controlled voltage environments: 500 VRMS Max. Operating Temperature: +50°C (+122°F) Max

ORDERING INFORMATION: Model 1296

All dimensions are in inches. Tolerances (except noted): $xx = \pm.02^{\circ}$ (,51 mm), $xxx = \pm.005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA



35 Vantage Point Drive // Rochester, NY 14624 // Call 1.800.800.5001