


Pomona®

**Model 6244 Minigrabber® Test Clip  
 To Right Angle Sheathed Banana Plug  
 Test Lead – IEC1010 Compliant**

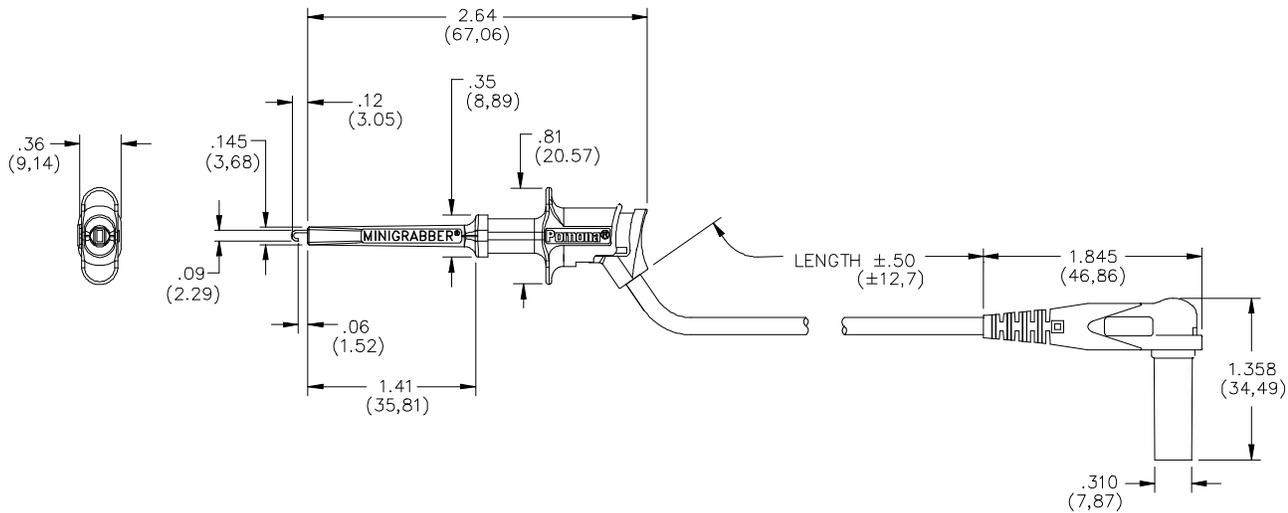

**FEATURES:**

- Newly designed Minigrabber® Test Clip Patch Cord complies with IEC1010-2-31, which is the latest international safety standard for test accessories.
- Grabber width is a slim .36” (9,14 mm) for easier side by side stacking.
- Grabber hook is gold plated beryllium copper to ensure signal integrity & attaches onto component leads up to .060” (1,5 mm) O.D.
- Grabber patch cord interfaces directly into the most popular multimeters configured with 4 mm sheathed safety jacks, including Amprobe, Fluke, H-P, Tektronix and Wavetek.
- For added safety, the grabber and banana plug body insulation material is fire retardant Nylon 6, UL94V-0 rated.
- Plug is molded directly to the cable in an integral one-piece design and the wire is double crimped for a long lasting connection.
- Multi-leaf banana spring material is nickel plated beryllium copper for extended insertion life & low contact resistance.
- High strand count silicone insulated wire offers excellent flexibility and high temperature resistance.

**MATERIALS:**

Grabber: Body: Nylon 6 – Fire Retardant – UL94 V-O Rated, Color per part number  
 Hook: Beryllium Copper, Gold Plated, Compression Spring: Music Wire  
 Wire: 18 AWG, 65 x 36 Tinned Copper, Insulation – Silicone, .144” (3,66 mm) O.D., Color per P/N  
 Banana Plug: Body - Brass, Nickel Plated, Spring – Beryllium Copper, Nickel Plated  
 Insulation - Polypropylene, Fire Retardant UL94 V-2 Rated, Color per part number

**RATINGS:**

IEC 1010-2-031, Category II, P2 Compliant  
 Operating Voltage: 300 VRMS/DC Max.  
 Current: 5 Amperes Max.

**ORDERING INFORMATION:** Model 6244-XX-\*

XX = Length in Inches, Standard Length: 48” (122 cm) \*= Color Code, -0 Black and -2 Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ±.005” (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies. Made in USA