


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/22/2021	B. HANSEN

NOTES:

- ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
- ADAPTER TO MEET OR EXCEED ALL SPECIFICATIONS PER MIL-39012.
- MATING DIMENSIONS IN ACCORDANCE WITH MIL-STD-348.
- VSWR AND FREQUENCY RANGE SPECIFICATIONS ARE FOR REFERENCE AND ARE DEPENDANT ON CABLE TYPE AND OTHER APPLICATION SPECIFIC CONDITIONS.
- MATERIAL:
 - BODY AND COUPLING NUT: BRASS, WHITE BRONZE
 - CENTER CONTACT: BeCu, GOLD PLATED
 - DIELECTRIC: PTFE
- ELECTRICAL:
 - IMPEDANCE: 50 Ω
 - FREQUENCY: DC - 12 GHz
 - INSERTION LOSS: $\leq 0.04 \times \sqrt{f(\text{GHz})}$ dB
 - INSULATION RESISTANCE: 5,000 MΩ MIN @ SEA LEVEL
 - DIELECTRIC WITHSTANDING VOLTAGE: 1,000 V MAX @ SEA LEVEL
 - VSWR: 1.15:1 @ DC - 12 GHz
- MECHANICAL:
 - TEMPERATURE RANGE: -55°C TO +165°C
- COUNTRY OF ORIGIN: CHINA
- RoHS AND REACH COMPLIANT.

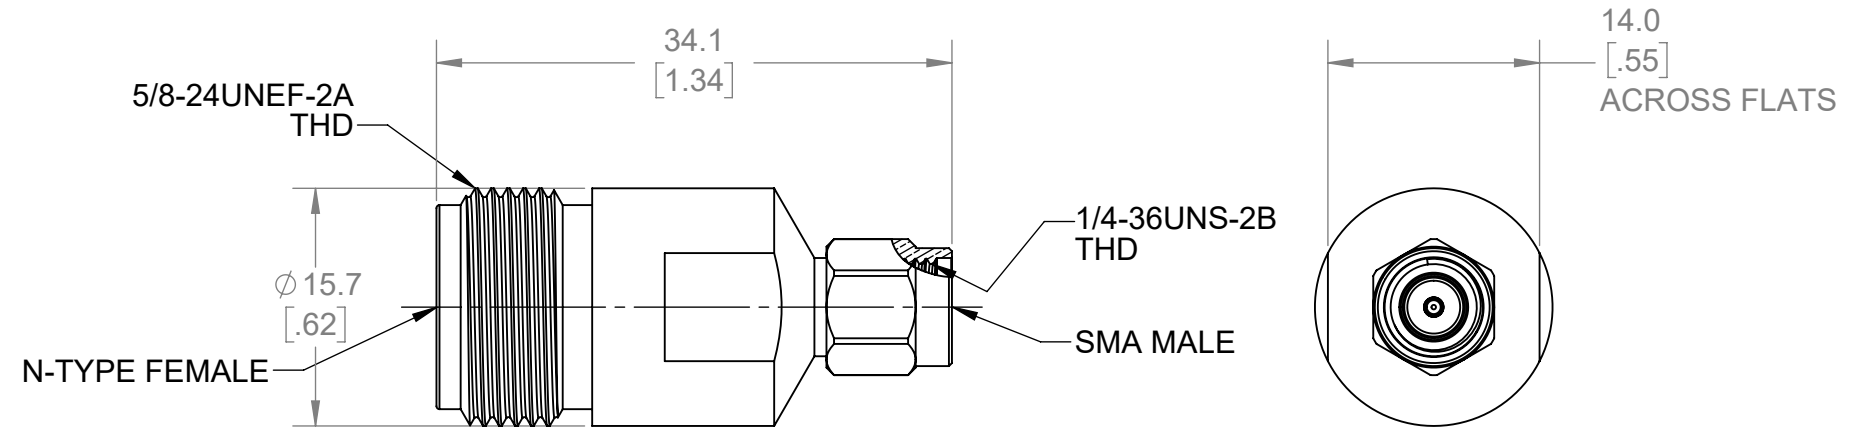

ISOMETRIC VIEW
FULL SCALE

CT3321A	BETWEEN-SERIES	IN-LINE
MODEL NUMBER	CONFIGURATION	NOTES / REFERENCE

THIRD ANGLE PROJECTION		PROJECT NO.		METRIC		Cal Test ELECTRONICS		22820 Savi Ranch Prky. Yorba Linda, CA 92887 USA			
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: X.X = ±0.5 X.X* = ±0.5* X.XX = ±0.25 X.XXX = ±0.125 DO NOT SCALE DRAWING	A598		TITLE		ADAPTER, N-TYPE FEMALE TO SMA MALE, 50 Ω, INSTRUMENT GRADE					
		APPROVALS		DATE		SIZE		CAGE CODE		DWG. NO.	
MATERIAL		DRAWN		CHECKER		B		43F45		A	
TREATMENT		ENGR.		DESIGN ACTIVITY		SCALE		2:1		SHEET 1 OF 1	
FINISH		N/A		B. HANSEN 7/7/2021				CT3321A			